

Entire north-wall frame aligned

TN chords, webs, door header and jambs, north braces, W4, N1 and N2 now occupy one plane at north-coordinate 253 inches.

TN moved 4 inches north; N1 moved 0.5 inch north to align with W4/N2. All 36 internal north-wall connections now have coincident member axes.

The east-end vertical and diagonals now terminate at actual chord nodes.

The upper door jamb meets the bottom chord directly.

The five-inch height difference between TE and TN bottom chords is carried by the real N2 column segment; the redundant offset link was removed.

Columns retain their existing extensions above the top chord.

TE, TW and TS member geometry is unchanged. TE/TW rear connections now meet TN at their ends. Floor load distribution uses the actual TN support station (253 inches) with the same loaded floor area and load intensities.



Both stages and final second-order analysis were rerun. The revised global network has been replayed independently across 70 load combinations.

These are analytical centerlines, not fabrication details. Connection hardware, foundations, roof-brace crossing details and full code checks remain unresolved.

Export replay verified 70 combinations. Maximum partial second-order screen: 0.953. The screen excludes the 125 psf storage sensitivity; it is not complete design approval.


TN Corrected wall elevation

Flat upper chord axis: 18 ft 8 1/4 in
Lower chord axis: 9 ft 7 in
Overall chord run: 23 ft 5 1/2 in

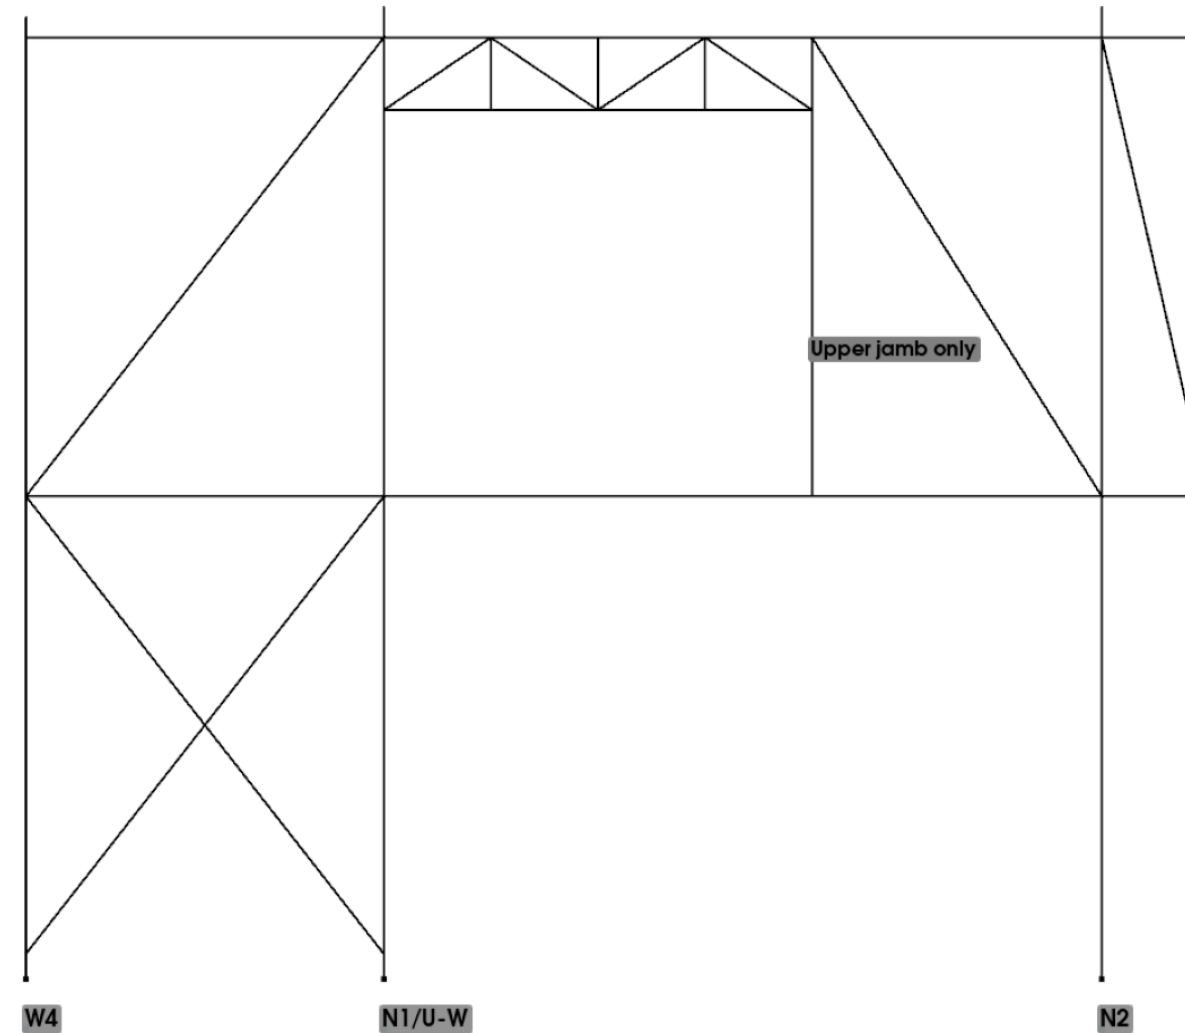


Entire north-wall frame aligned at north coordinate 253 in; joints share nodes.
Preliminary fixed-base model; connection and foundation design remains.

NORTH Support path

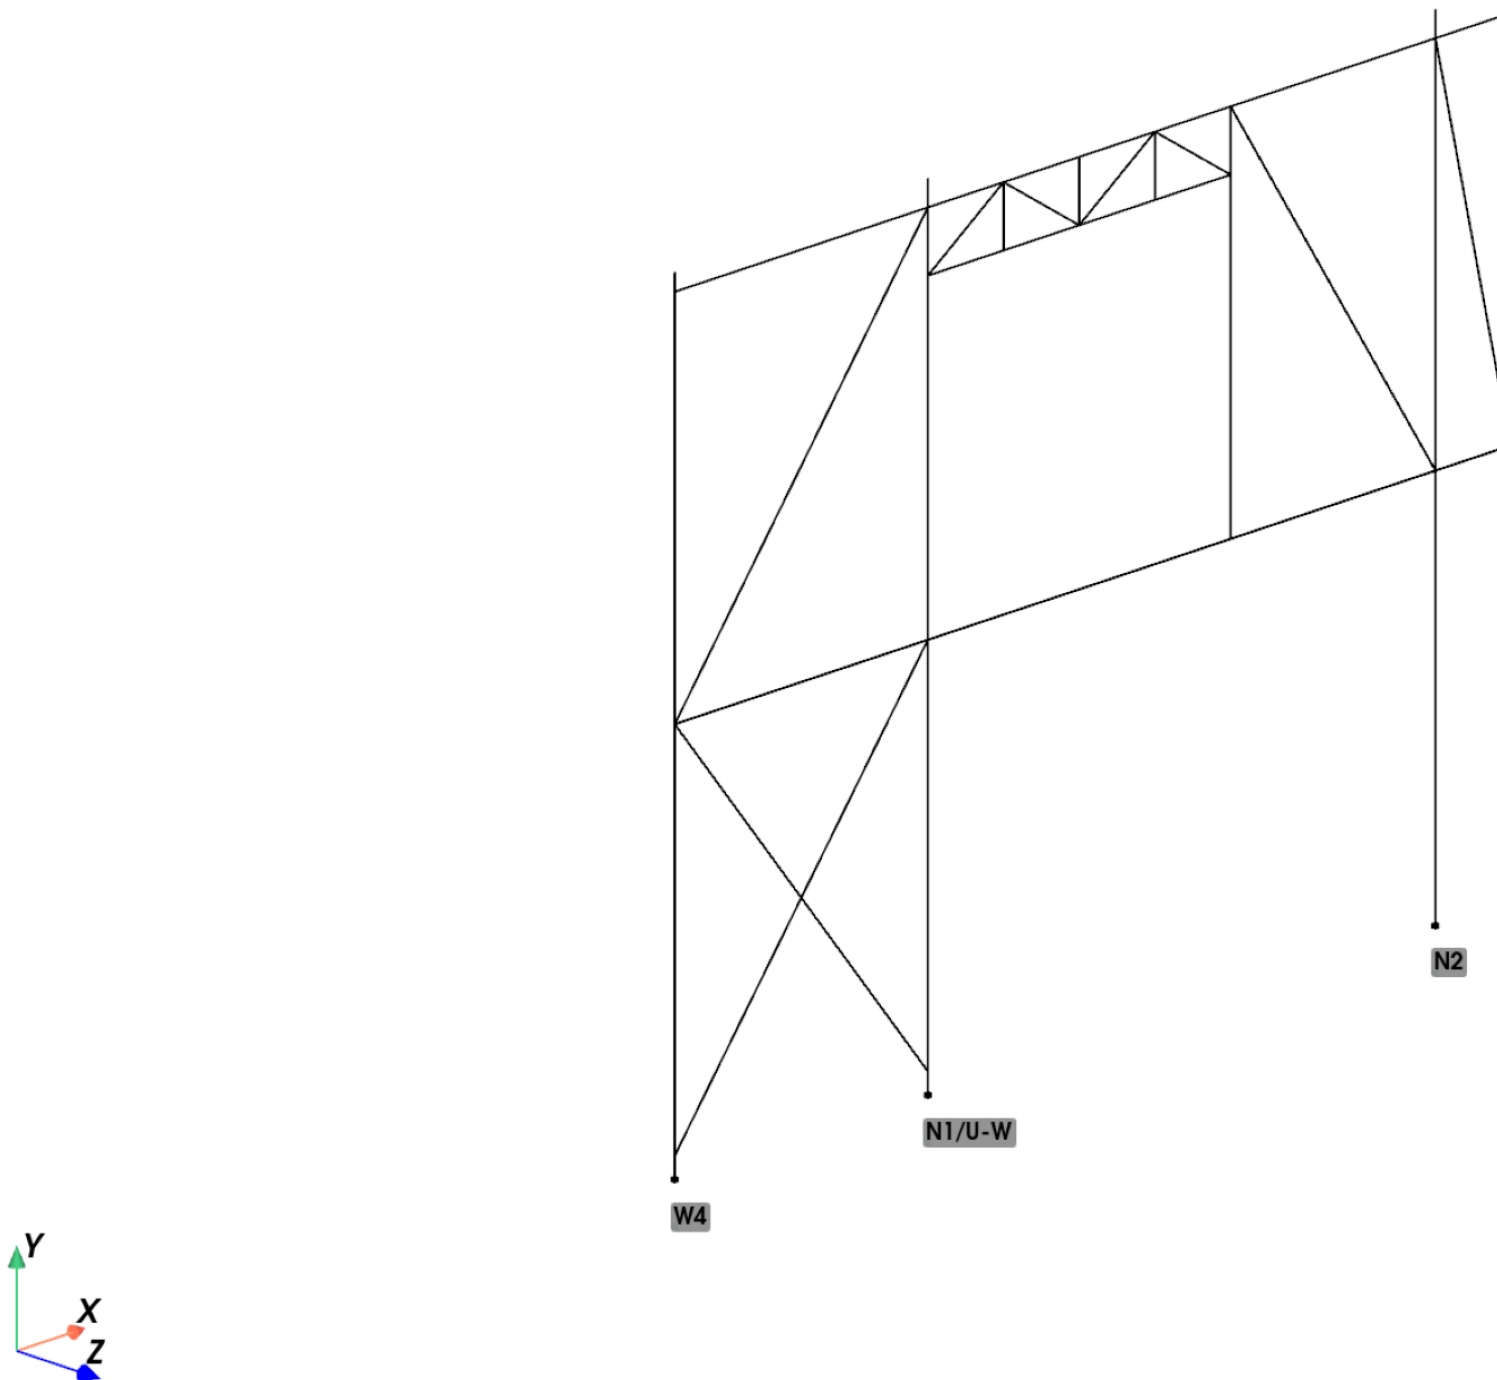


Entire north-wall frame aligned at north coordinate 253 in; joints share nodes.
Preliminary fixed-base model; connection and foundation design remains.

TN Corrected over-door mini-truss

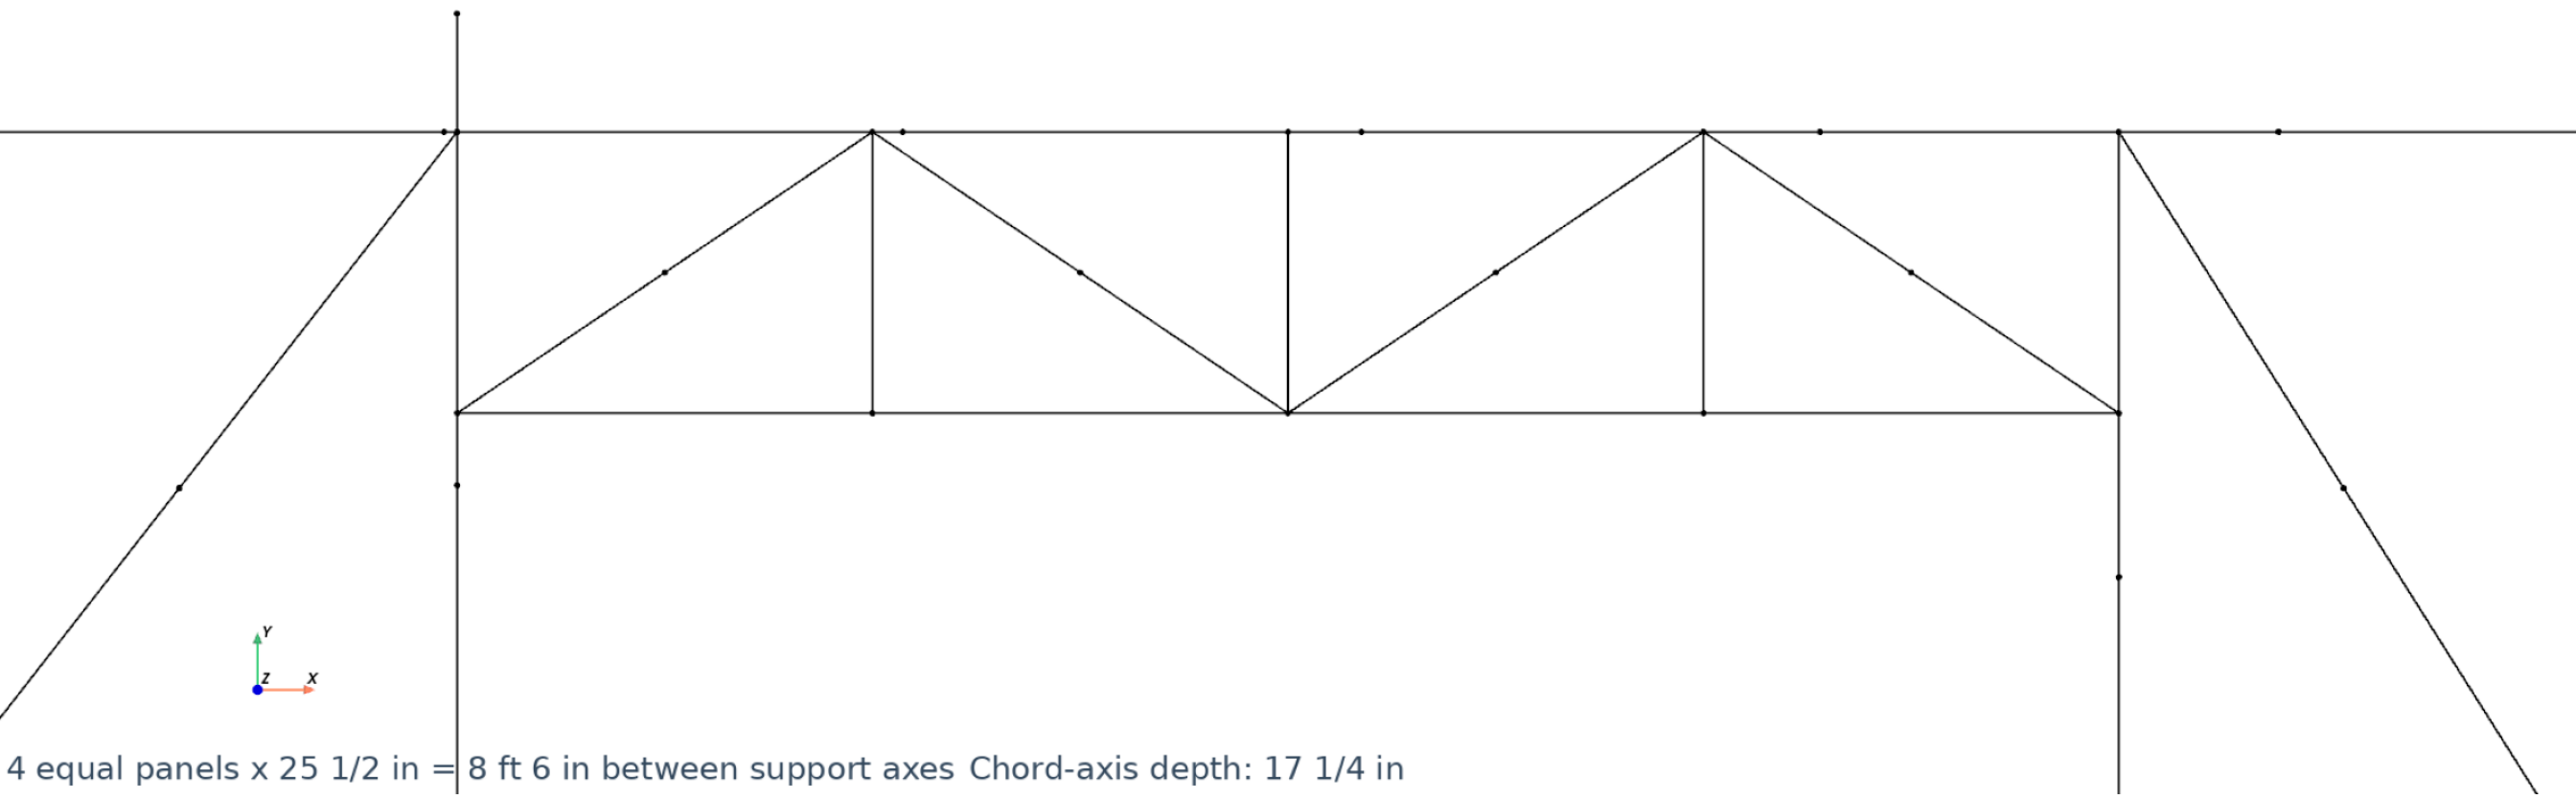

ALL Support path

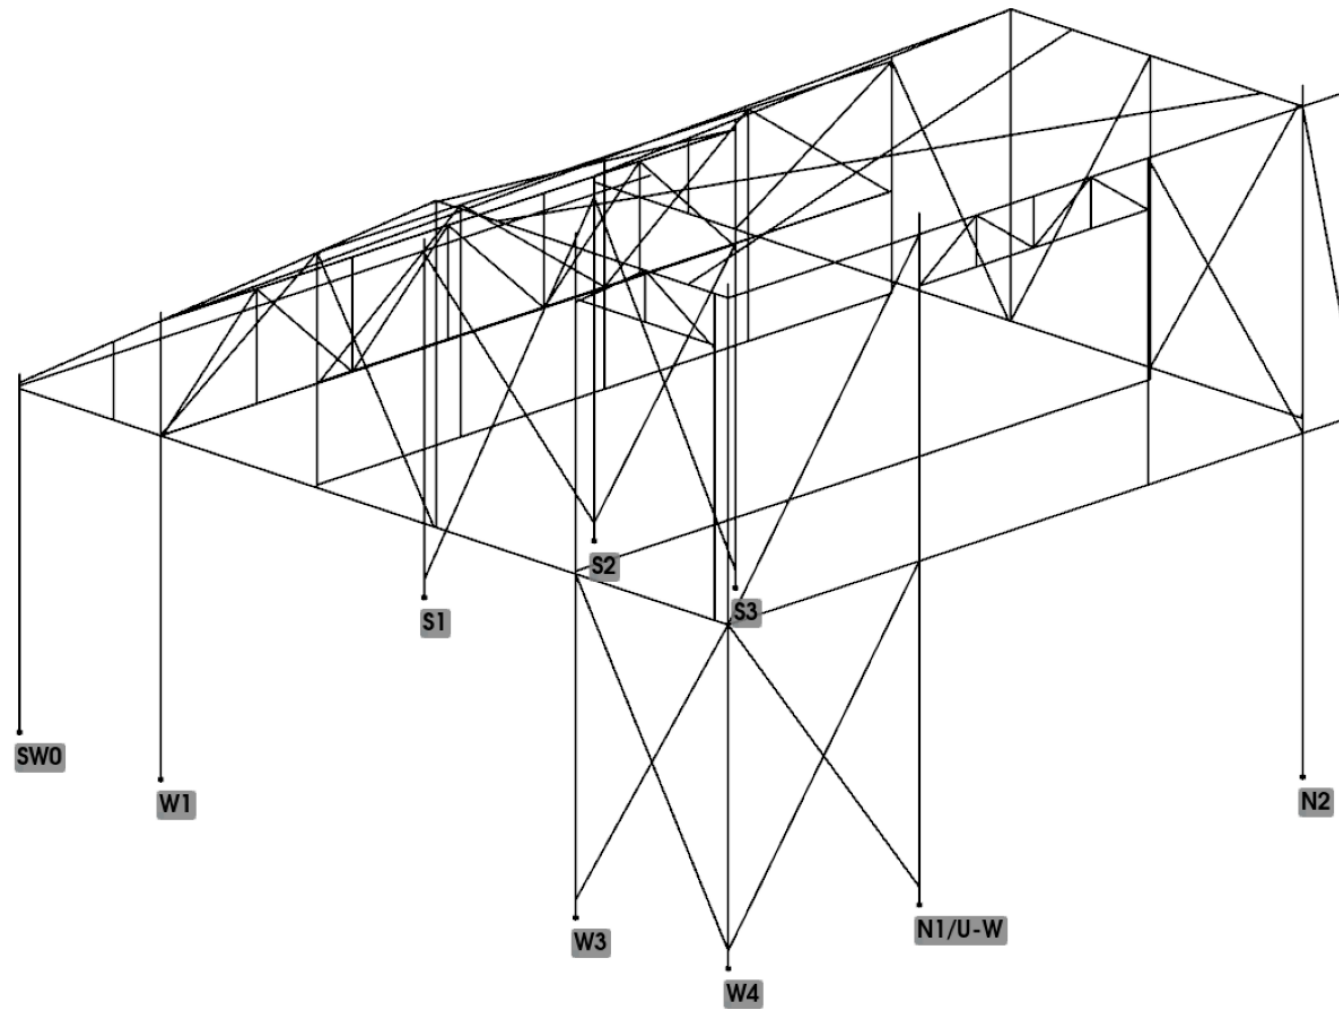

Entire north-wall frame aligned at north coordinate 253 in; joints share nodes.
Preliminary fixed-base model; connection and foundation design remains.