


GARAGE - REVISED FRAMING PLAN

Roof removed · north up · every primary member labeled

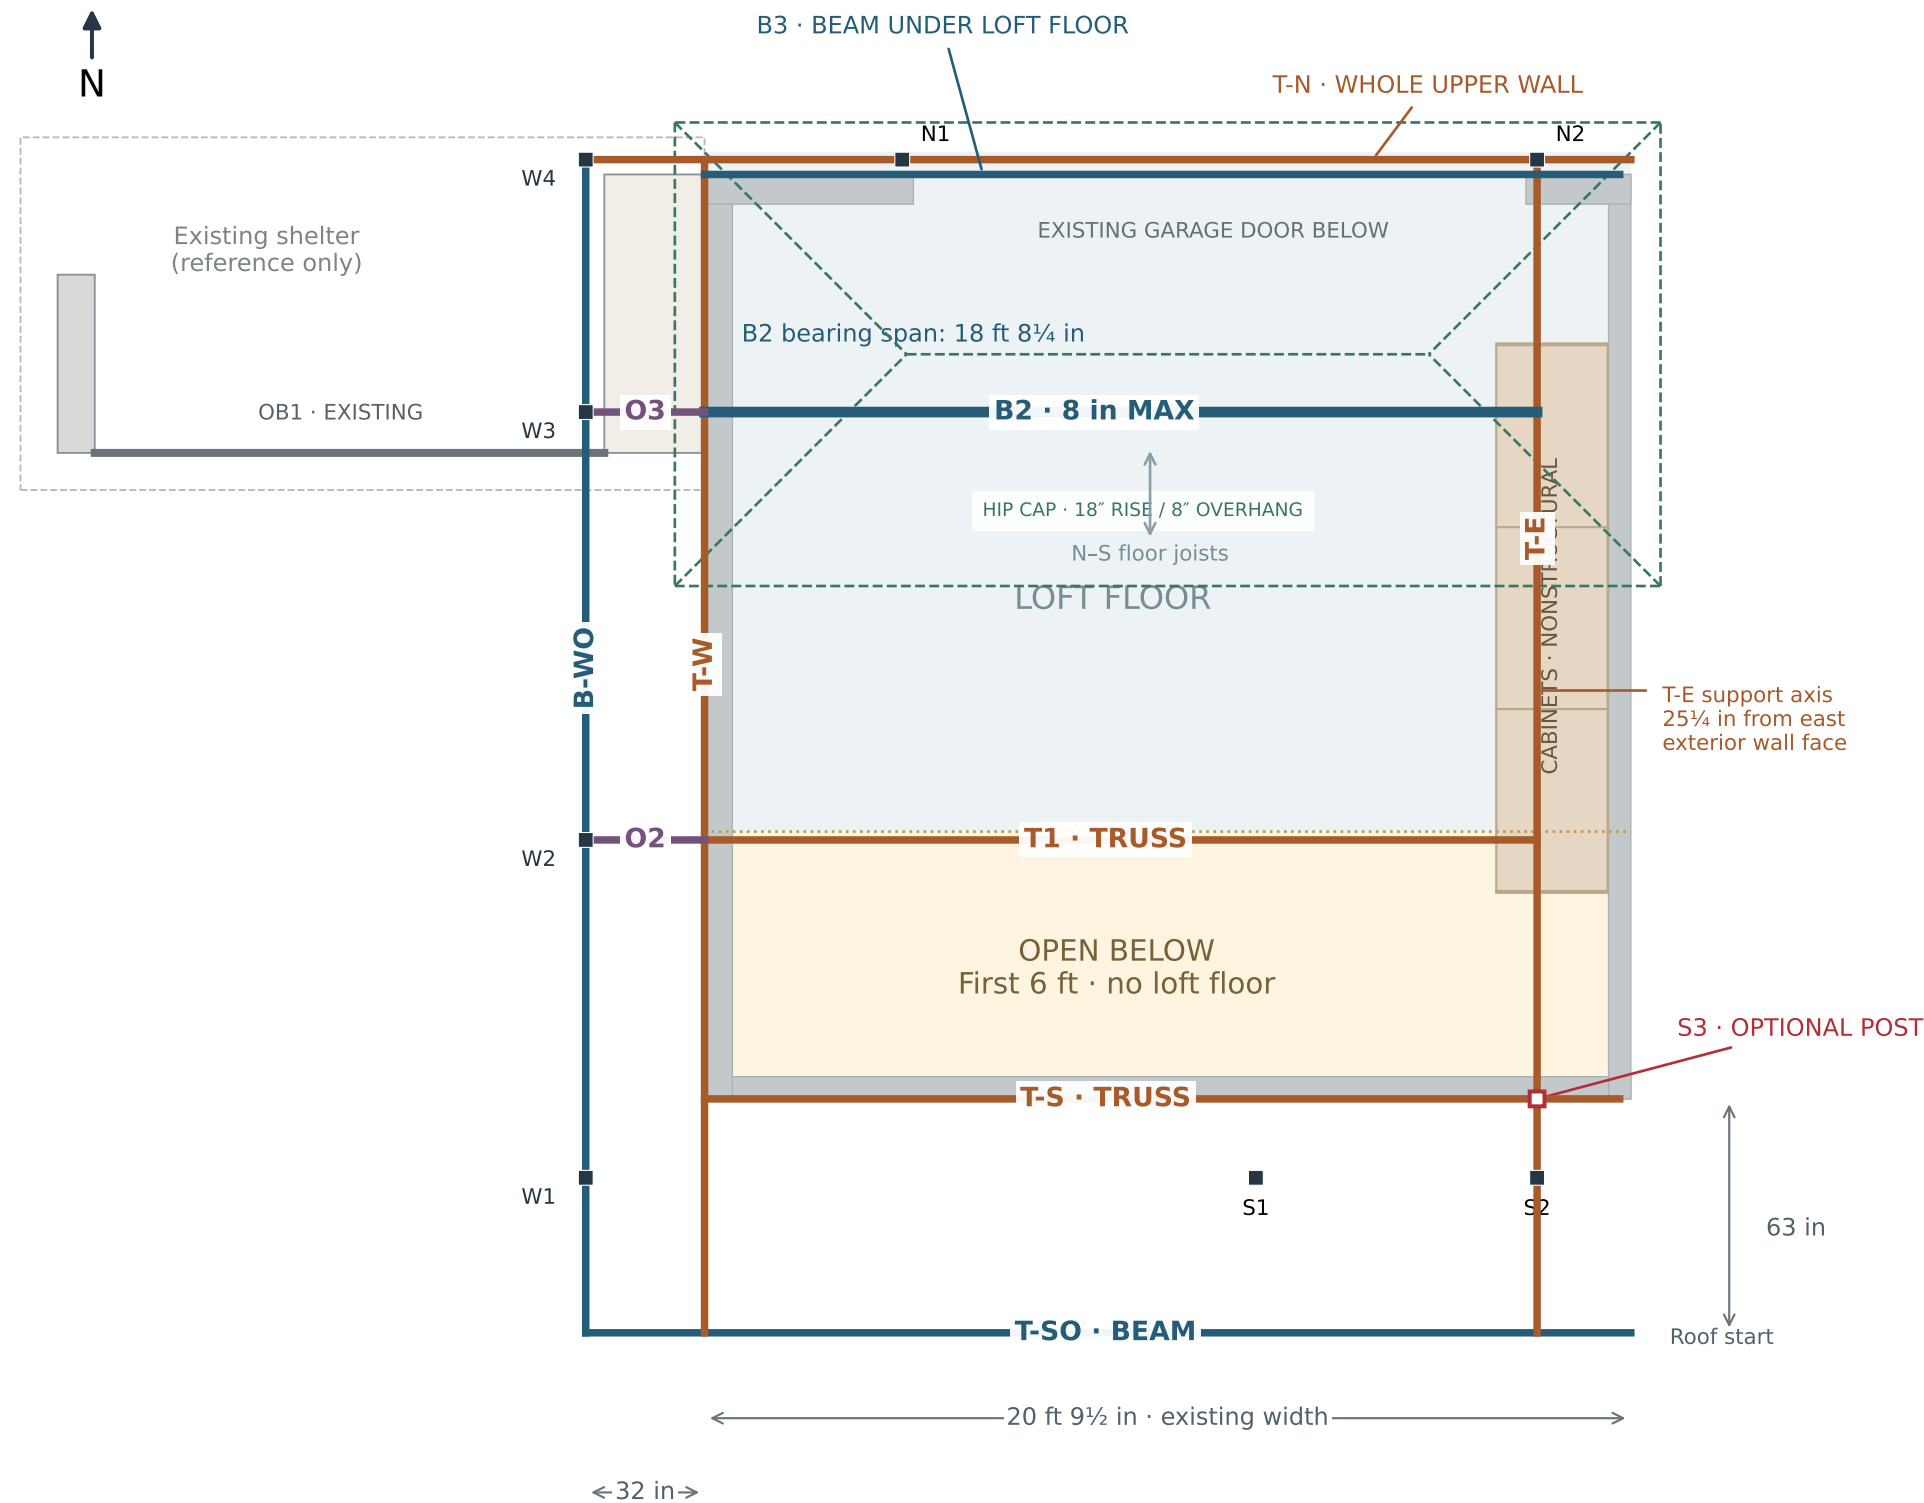

MEMBER REGISTER

T-S	Wall-top datum truss · reaches roof
T-E	East truss · aligned S2 / S3 / N2
T-W	West wall truss
B3	North wall BEAM · under loft floor
T-SO	Southernmost BEAM · common datum
T1	Truss · wall-top datum to roof
B2	Main loft beam · 8 in max depth
T-N	North wall truss · includes loft door
B-WO	West outer longitudinal beam
O2 / O3	Transfers from west wall to outer posts
OB1	Existing shelter front beam

DRAWING BASIS

- S2 moved east 12¾ in to align with N2.
- Gray = existing walls; brown fill = cabinets.
- Hollow red S3 = optional 4-inch post.
- Solid orange = truss; B-S removed.
- Truss depth is vertical, not plan width.
- All bottoms = wall top; columns carry loads.

Every beam / truss bottom is at 8 ft 2½ in, aligned with the wall tops. Loads go to columns, not the old walls.

Concept only: T-SO is 63 in south of T-S. B-S removed; south support-row / T-SO bearing details remain unresolved.

The previous east-wall trial post E1 is omitted from this option; it no longer aligns with T-E. Cabinets remain nonstructural. Beam sizes and transfers require reanalysis.