


EAST WALL STUDY / FLOOR PLAN

EW-P1 Wall strengthening over the revision 07 plan • north up


Discussion sketch | September 15, 2026

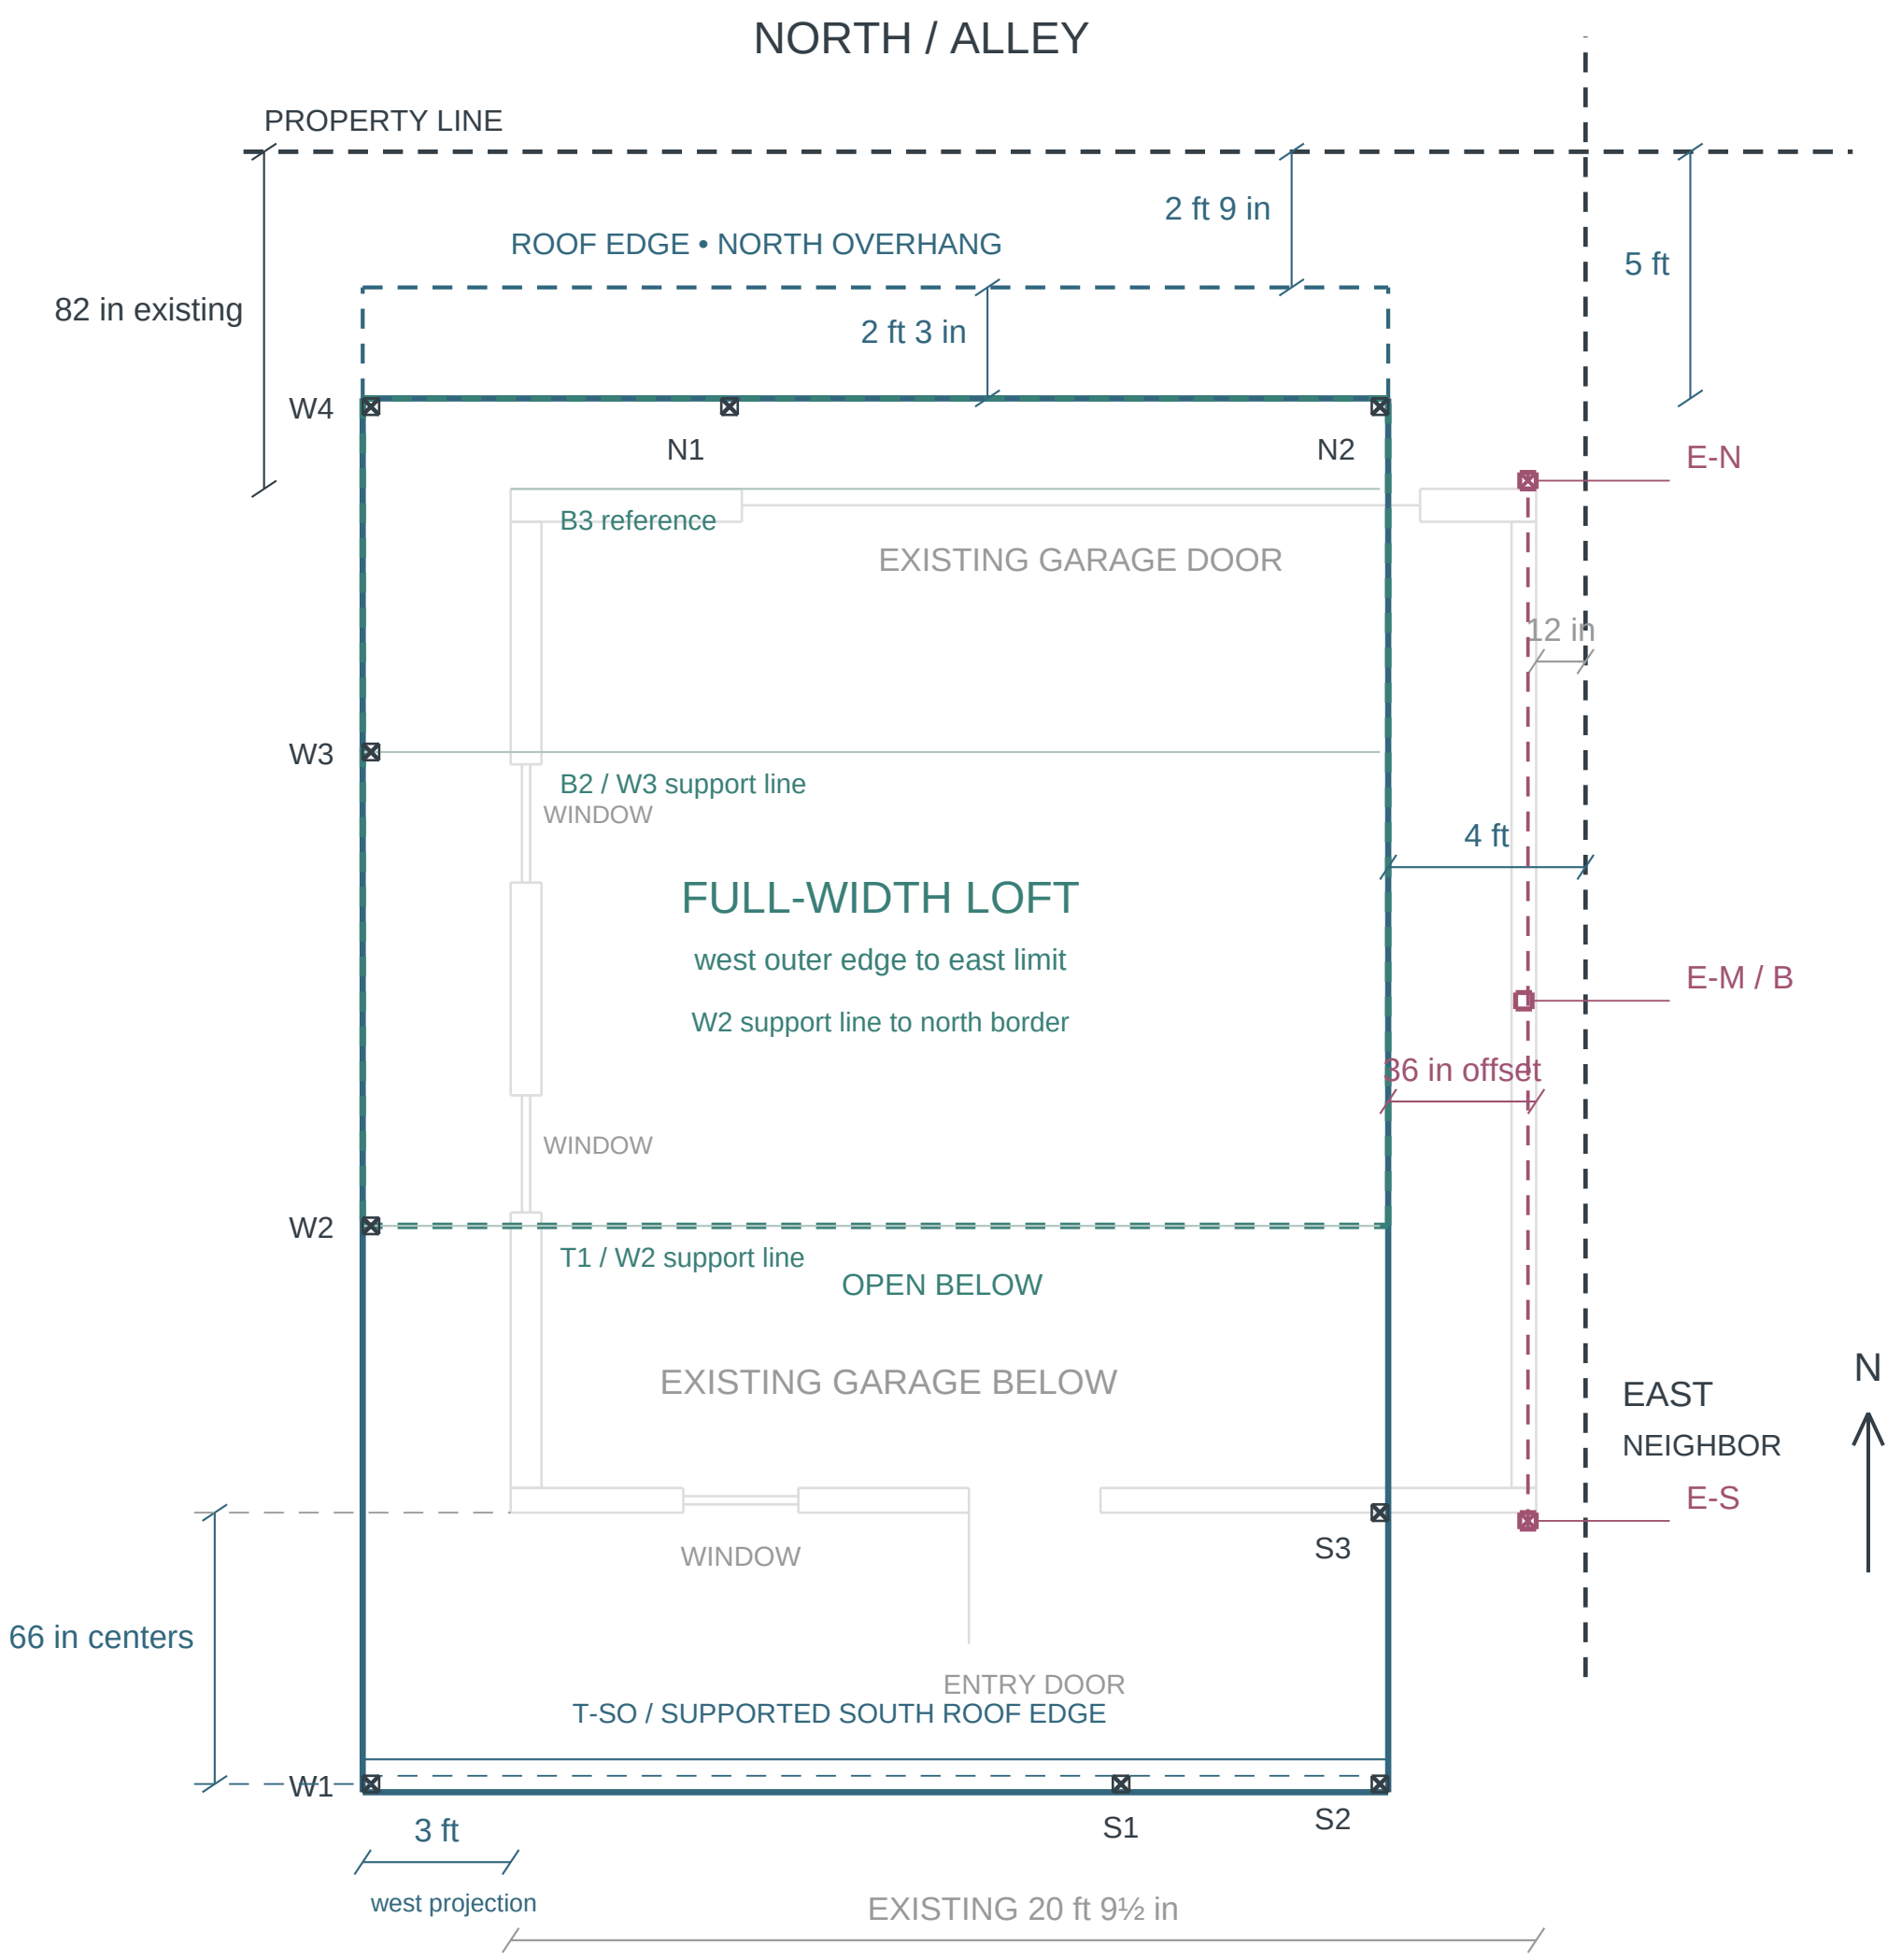

EAST WALL FRAME / TWO OPTIONS


- A — E-S + E-N end posts with overhead beam/truss.
 - B — Same frame, plus concealed center post E-M.
- Purple dashes along wall = overhead beam centerline.
E-S/E-N are separate from upper-frame S/N columns.
End-post east faces align with existing wall east face.
Entire 12-in east strip stays clear of posts.

1 / NORTH END POST — PLAN DETAIL

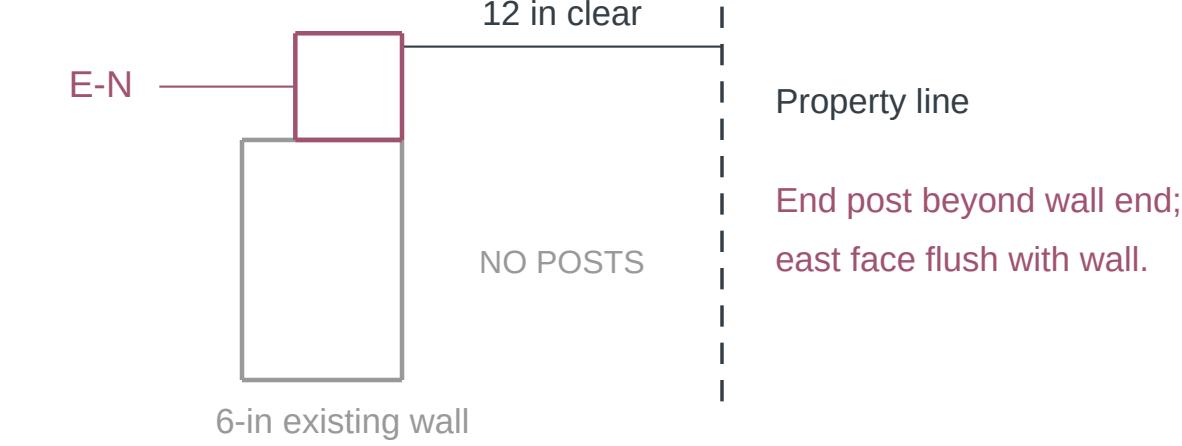

South end mirrors this: E-S lies just south of the wall.

2 / CENTER POST — PLAN DETAIL (B ONLY)

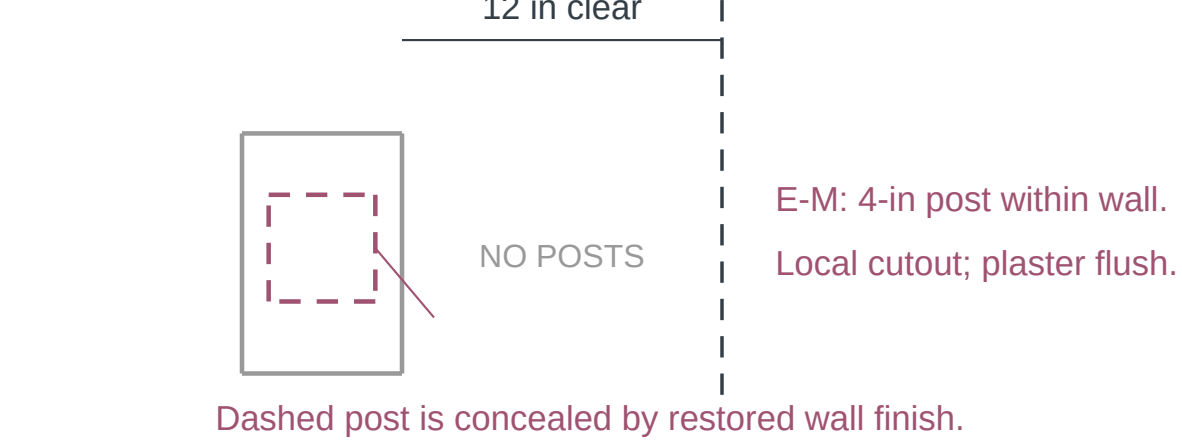

CONNECTIONS TO DEVELOP

- Upper steel edge stays 36 in inward of the wall face.
- Beam width, transfer connections and foundations are unresolved.
- Post positions follow the corrected East Wall Study, revision 04.
- Post envelopes only; footing/base-plate footprints are not shown.

Sources: Draft East Wall strengthening (linked task), East Wall Study rev. 04, and current floor plan rev. 07.