


EAST WALL STUDY / FLOOR PLAN

EW-P2 Wall strengthening over the revision 08 plan • north up


Discussion sketch | September 15, 2026

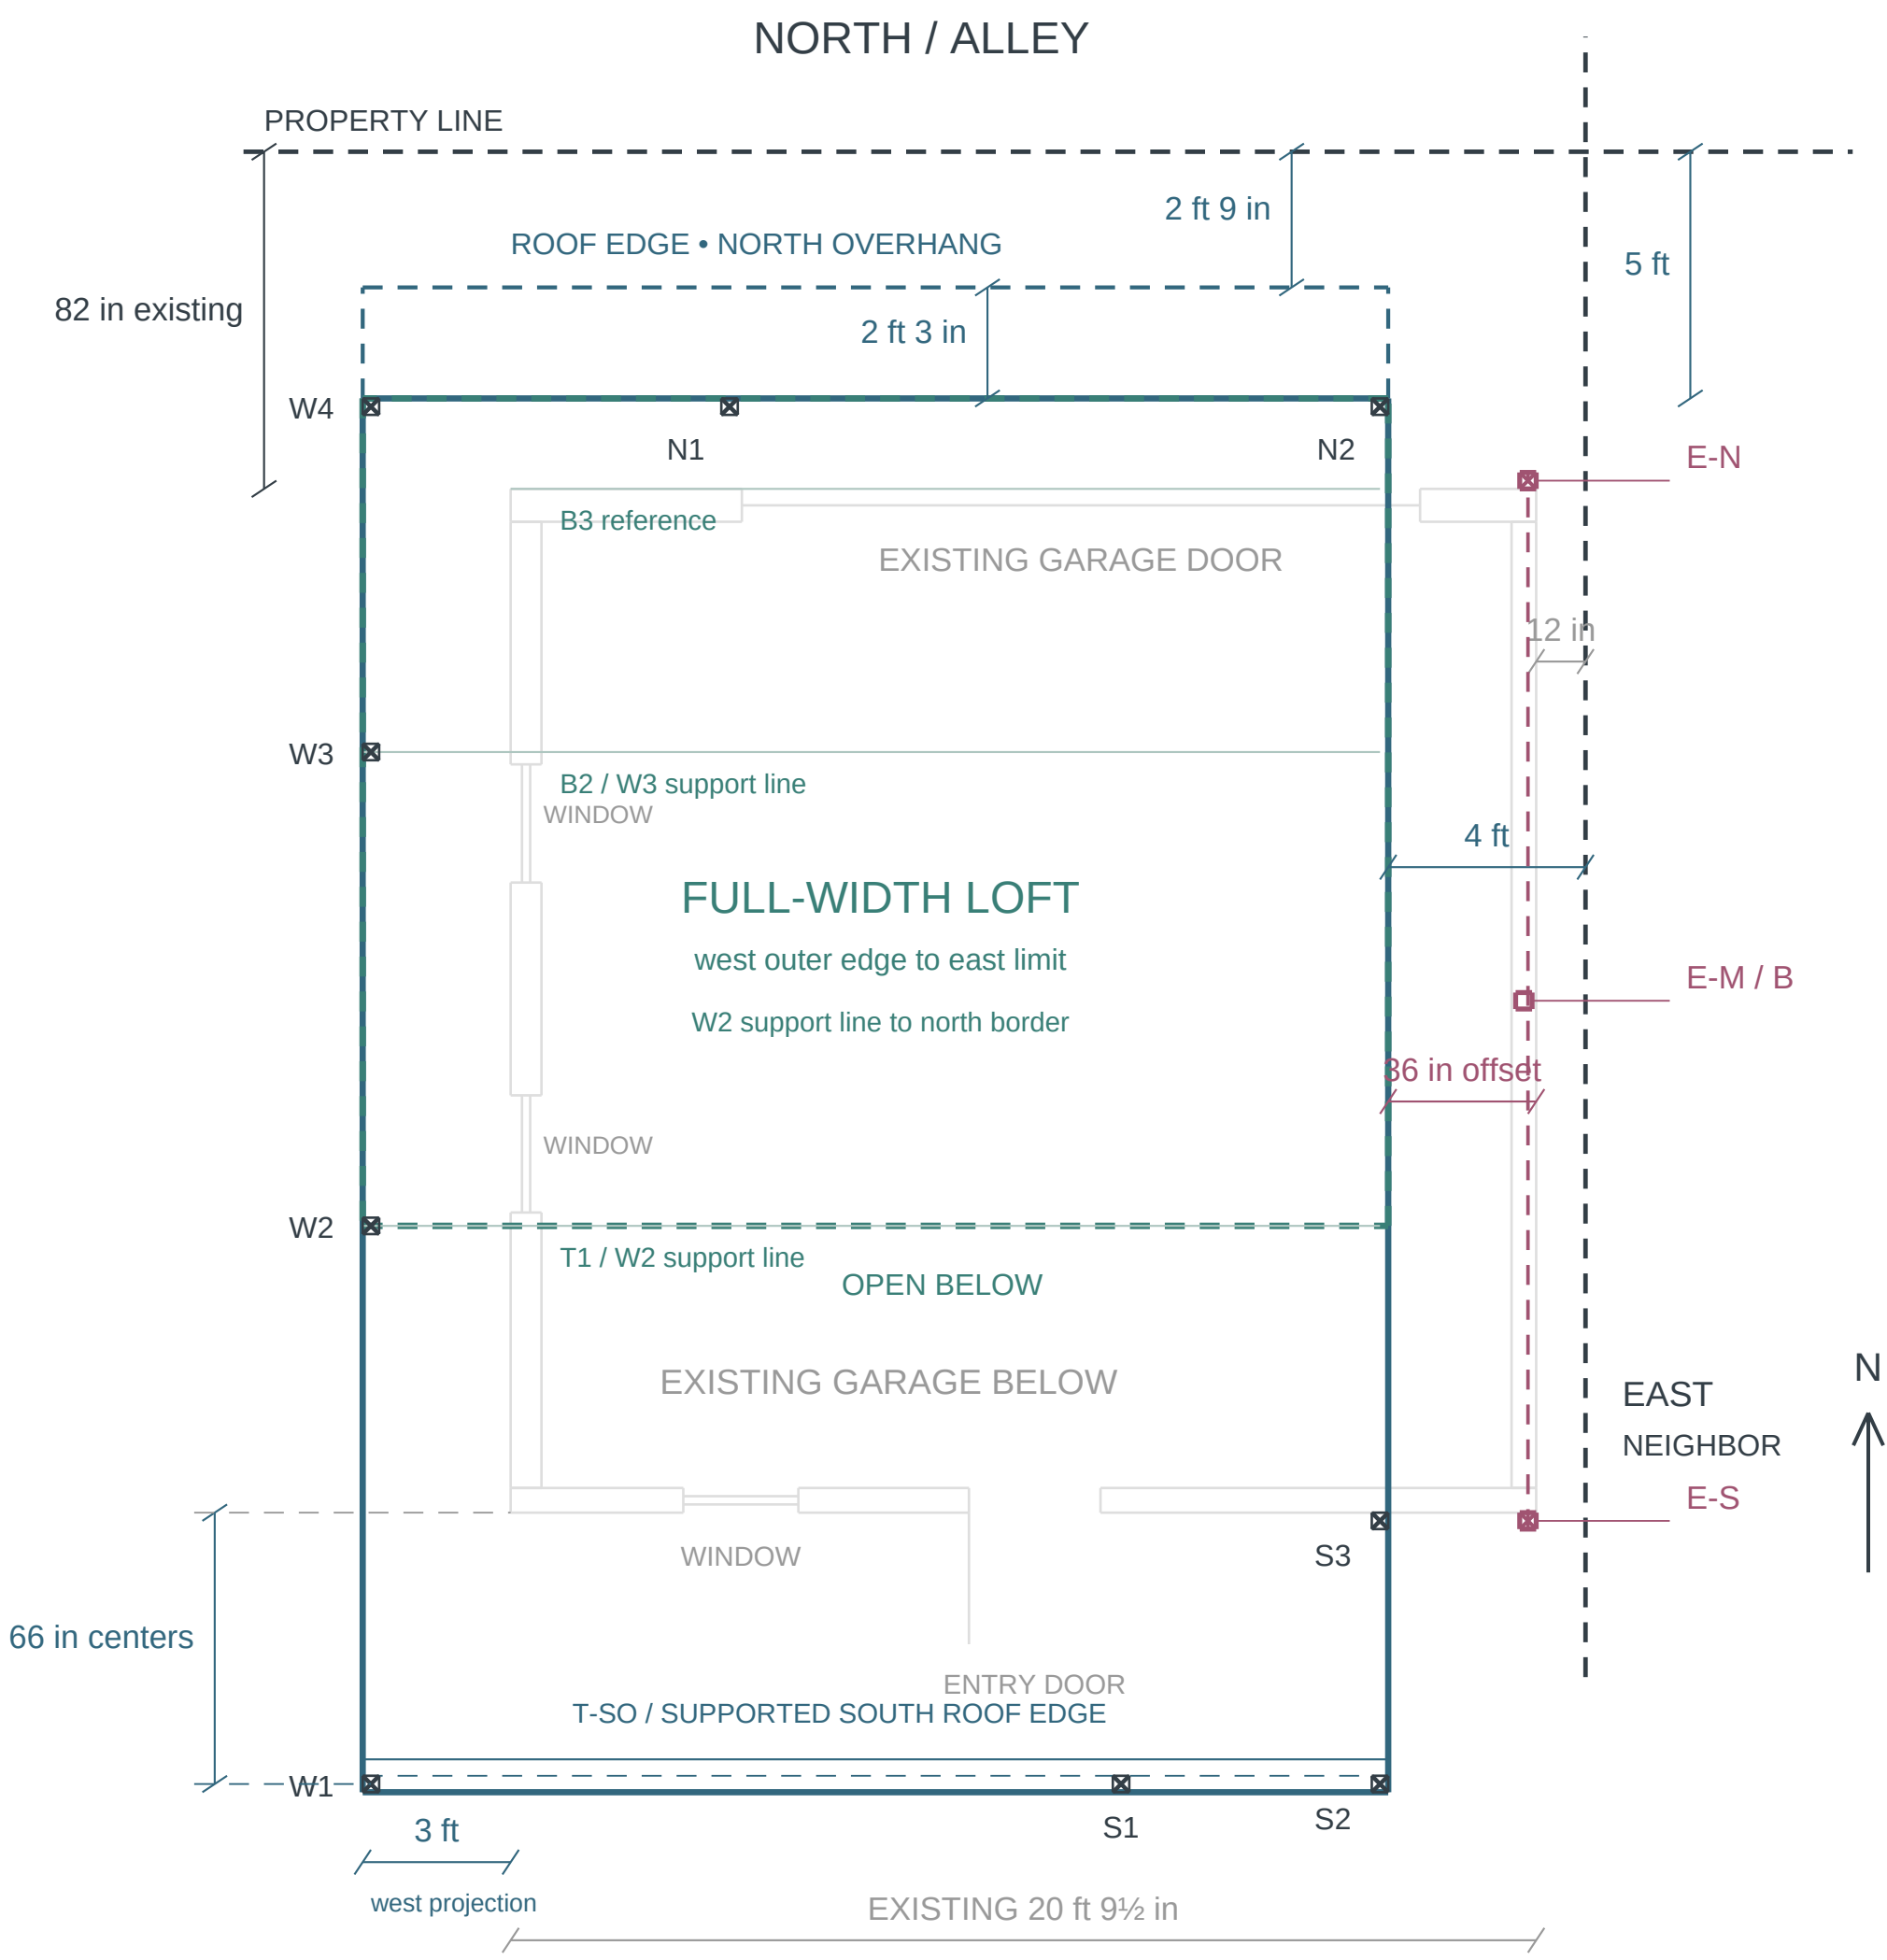

EAST WALL FRAME / TWO OPTIONS


A — E-S + E-N end posts with overhead beam/truss.
B — Same frame, plus concealed center post E-M.
Purple dashes along wall = overhead beam centerline.
E-S/E-N are separate from upper-frame S/N columns.
End-post east faces align with existing wall east face.
Entire 12-in east strip stays clear of posts.

1 / NORTH END POST — PLAN DETAIL

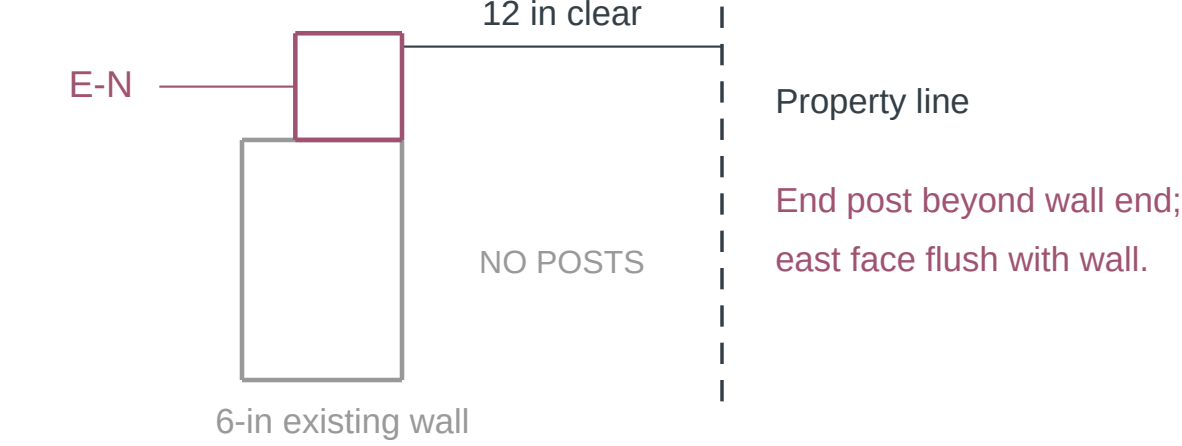

South end mirrors this: E-S lies just south of the wall.

2 / CENTER POST — PLAN DETAIL (B ONLY)

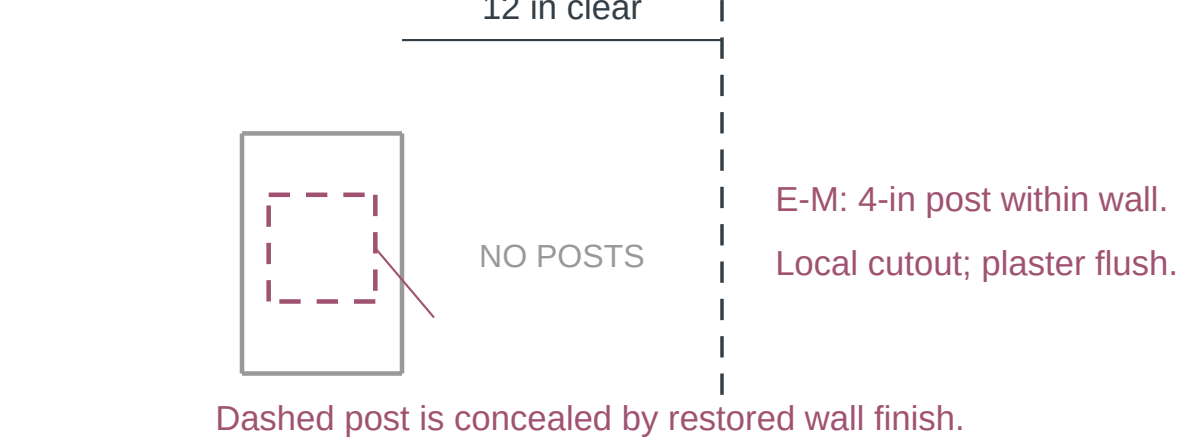

CONNECTIONS TO DEVELOP

Upper steel edge stays 36 in inward of the wall face.
Beam width, transfer connections and foundations are unresolved.
Post positions follow the corrected East Wall Study, revision 04.
Post envelopes only; footing/base-plate footprints are not shown.

Sources: Draft East Wall strengthening (linked task), East Wall Study rev. 04, and current floor plan rev. 08.