


GARAGE / BEAM & SUPPORT COORDINATION DRAFT

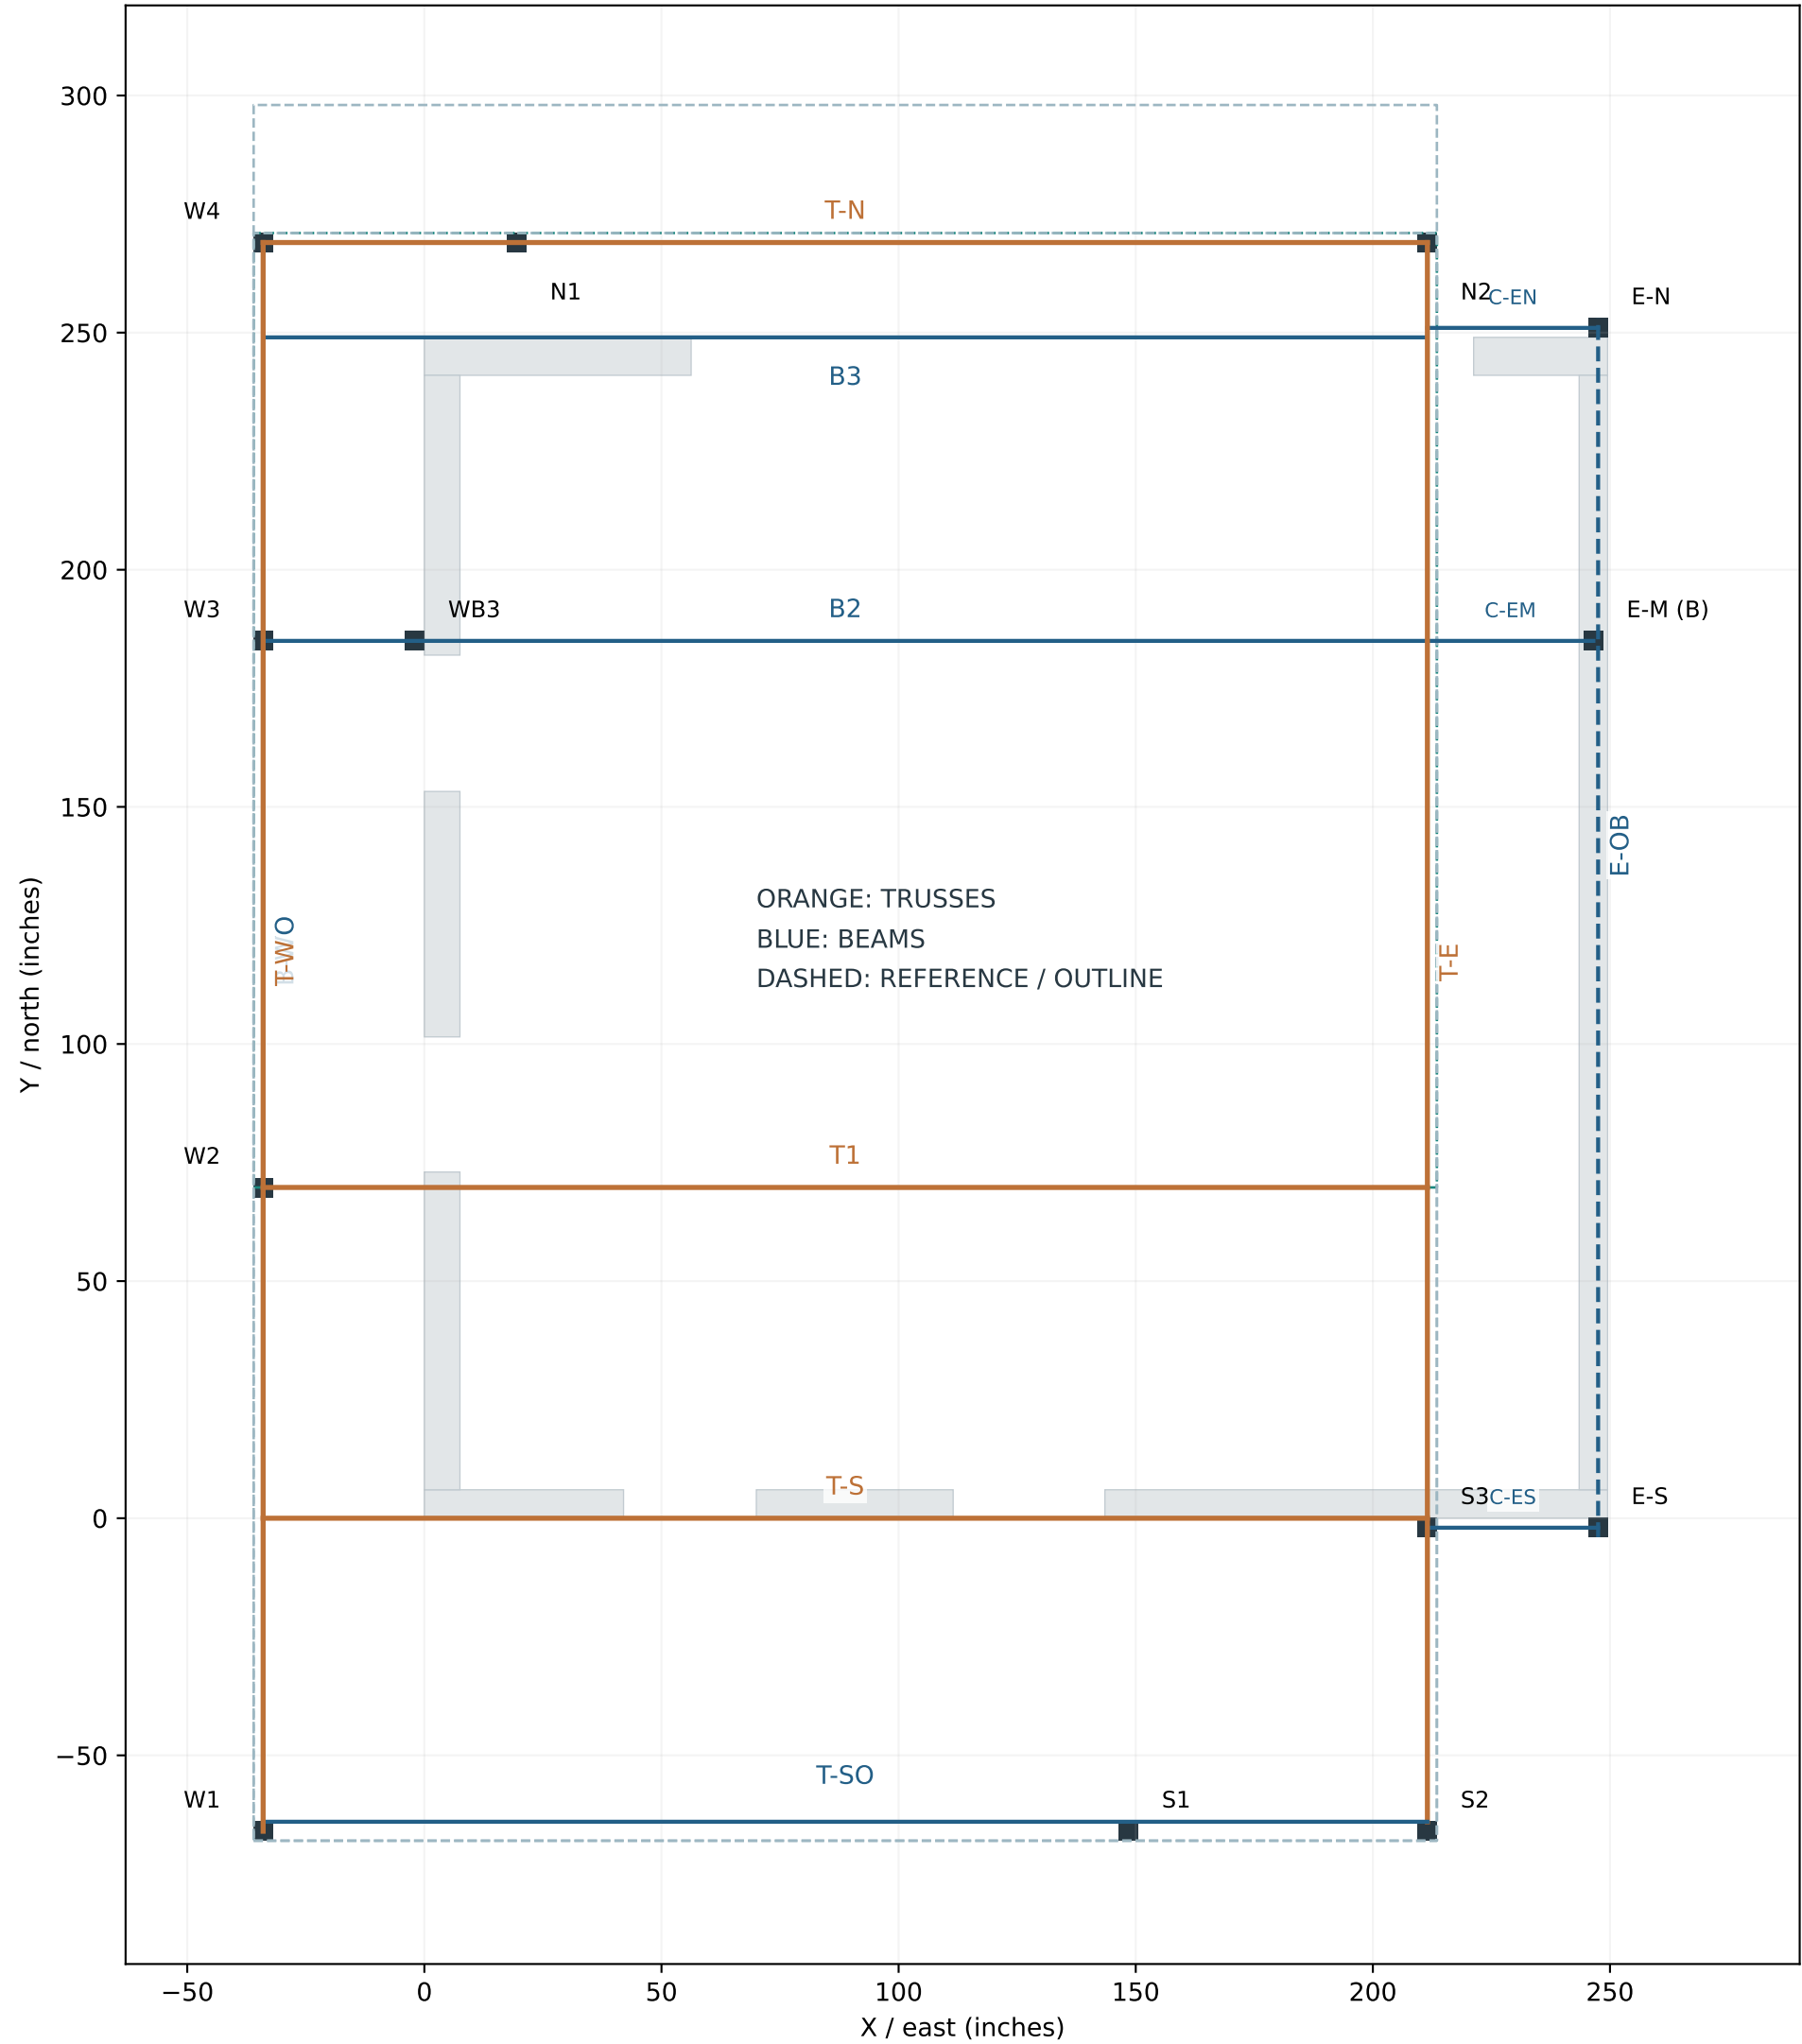

Current support positions drive draft member axes. Geometry only; bearing details unresolved.
OB1 is listed separately as outbuilding context. E-M is option B only. Roof/loft outlines are plan limits.

SUPPORT POSITION SCHEDULE / INCHES

Support	Center X	Center Y	Plan symbol	Status	Base / top Z
E-M	246.5	185	4 × 4	B only	0 / 98.5 trial
E-N	247.5	251	4 × 4	A and B	0 / 98.5 trial
E-S	247.5	-2	4 × 4	A and B	0 / 98.5 trial
N1	19.5	269	4 × 4	proposed	0 / 98.5
N2	211.5	269	4 × 4	proposed	0 / 98.5
S1	148.5	-66	4 × 4	proposed	0 / 98.5
S2	211.5	-66	4 × 4	proposed	0 / 98.5
S3	211.5	-2	4 × 4	proposed	0 / 98.5
W1	-34	-66	4 × 4	proposed	0 / 98.5
W2	-34	69.75	4 × 4	proposed	0 / 98.5
W3	-34	185	4 × 4	proposed	0 / 98.5
W4	-34	269	4 × 4	proposed	0 / 98.5
WB3	-2	185	4 × 4	proposed	0 / 98.5



SW exterior garage corner is X=0, Y=0. Symbol dimensions do not select structural sections.
All current support coordinates come from the floor-plan basis; E-M is an option-B support.

BEAM & TRUSS POSITION SCHEDULE / INCHES

Member	Type	Start (X, Y)	End (X, Y)	Ref. length	Bottom Z
B-WO	beam	(-34, -66)	(-34, 269)	335.00	98.5
B2	beam	(-34, 185)	(211.5, 185)	245.50	98.5
B3	beam	(-34, 249)	(211.5, 249)	245.50	98.5
C-EM	beam	(246.5, 185)	(211.5, 185)	35.00	98.5
C-EN	beam	(247.5, 251)	(211.5, 251)	36.00	98.5
C-ES	beam	(247.5, -2)	(211.5, -2)	36.00	98.5
E-OB	beam	(247.5, -4)	(247.5, 253)	257.00	98.5
O2	subsegment	(-34, 69.75)	(0, 69.75)	34.00	98.5
O3	subsegment	(-34, 185)	(0, 185)	34.00	98.5
OB1	context beam	(-164.25, 174)	(-27, 174)	137.25	unknown
T-E	truss	(211.5, -64)	(211.5, 269)	333.00	98.5
T-N	truss	(-34, 269)	(211.5, 269)	245.50	98.5
T-S	truss	(-34, 0)	(211.5, 0)	245.50	98.5
T-SO	beam	(-34, -64)	(211.5, -64)	245.50	98.5
T-W	truss	(-34, -66)	(-34, 269)	335.00	98.5
T1	truss	(-34, 69.75)	(211.5, 69.75)	245.50	98.5



Plan lines are reference axes, not solid member envelopes. Lengths are not fabrication cuts.
Draft positions and source assumptions are itemized in coordination-report.md. E-OB uses a provisional 3-inch display envelope. OB1 elevation is unknown.

T-S / PARAMETRIC TRUSS STUDY

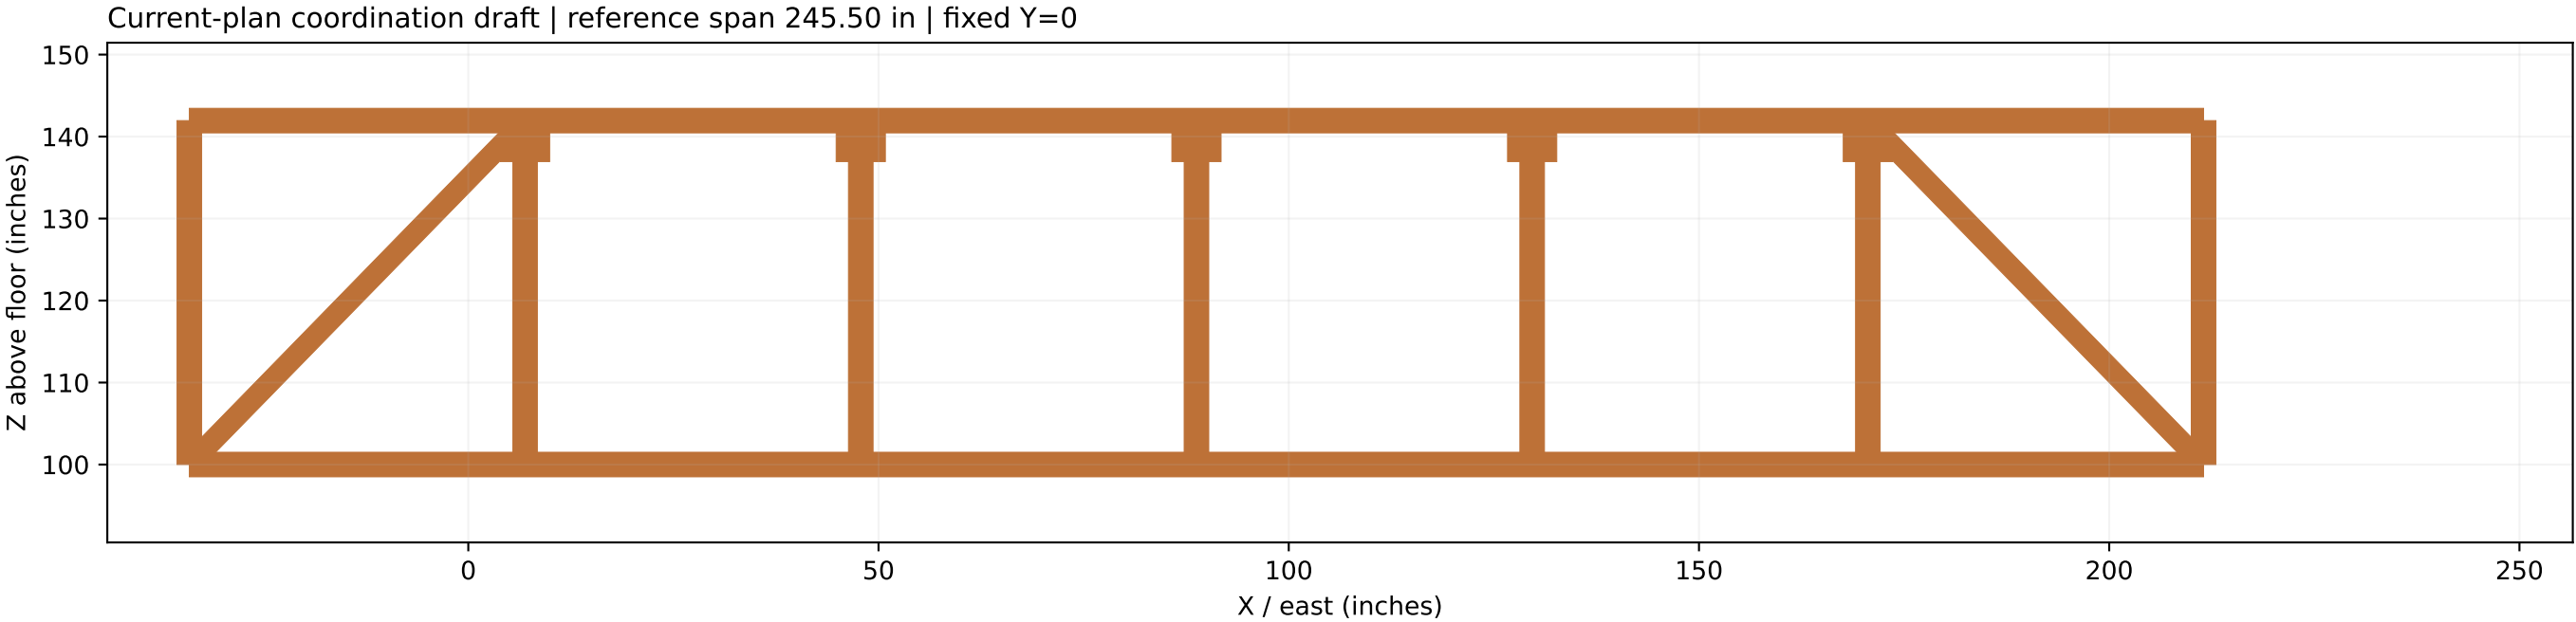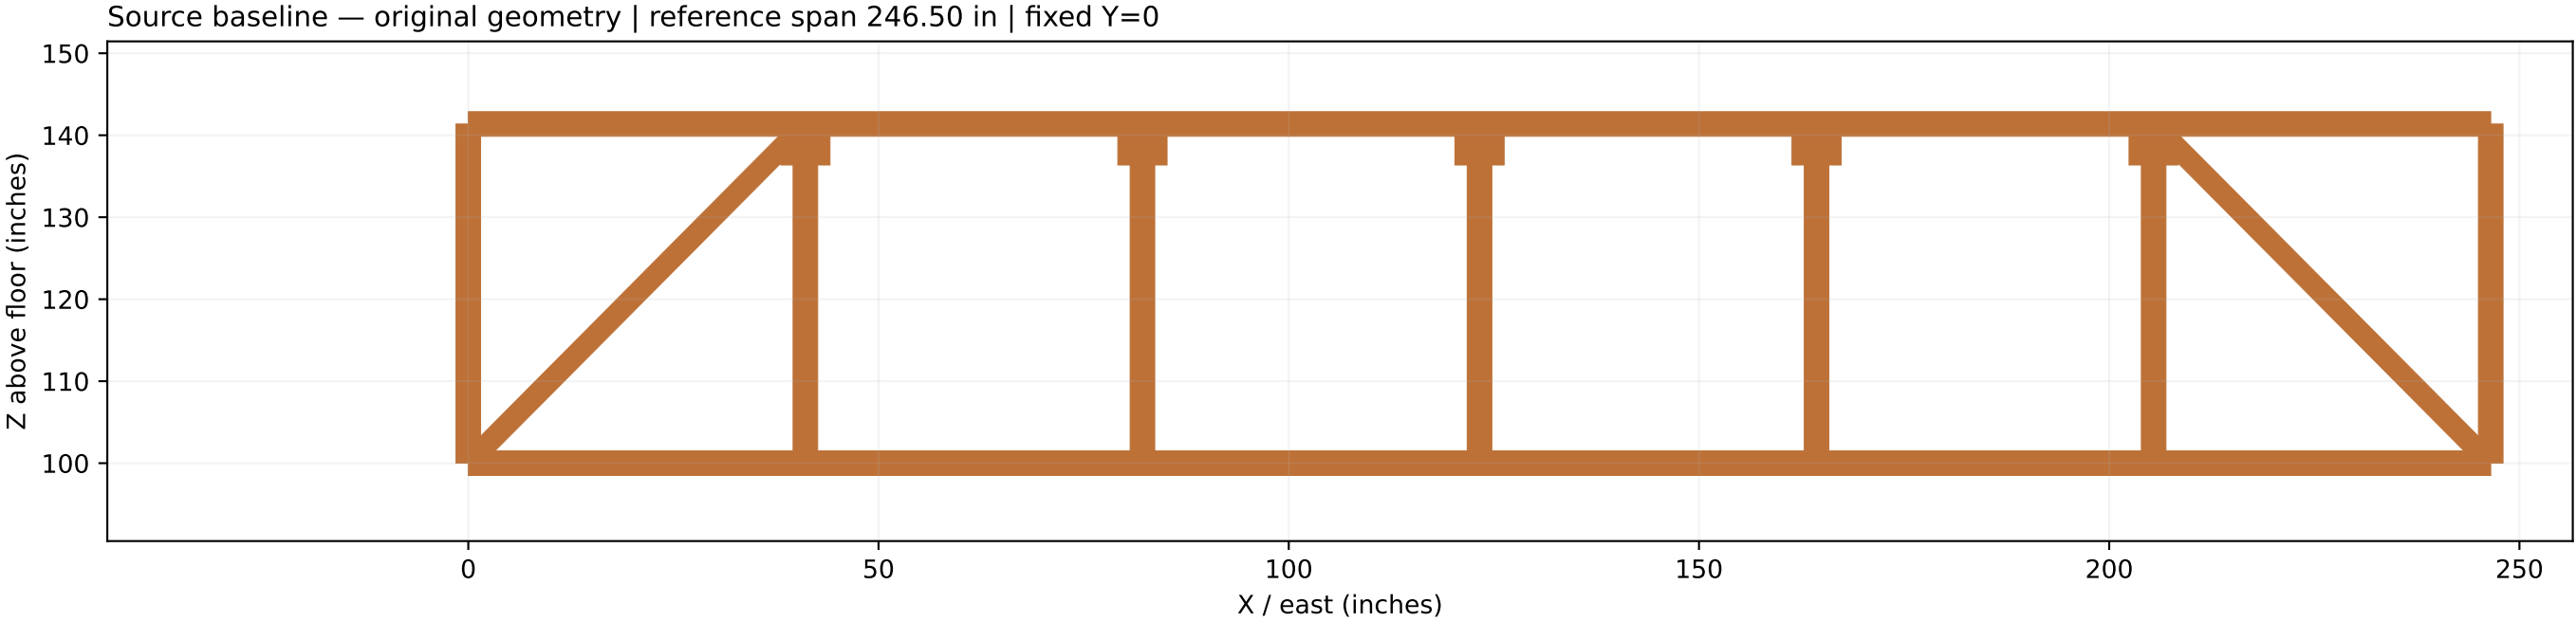



All members regenerated from endpoints and section envelopes. Old mesh import is used only to verify the baseline.
Draft roof and opening details are assumptions; attachment checks are geometric, not structural design.

T1 / PARAMETRIC TRUSS STUDY

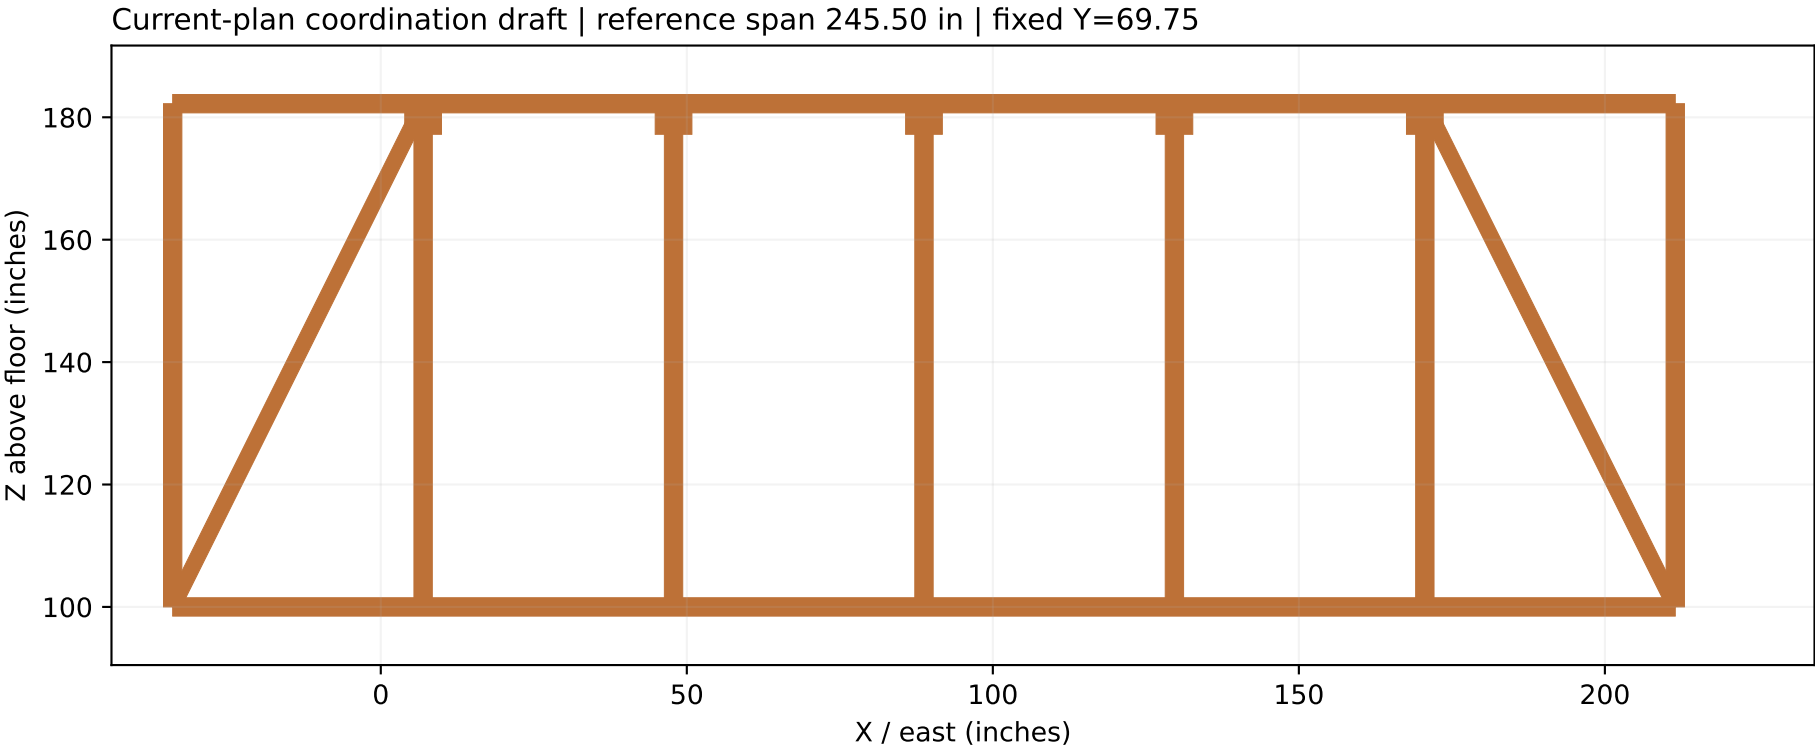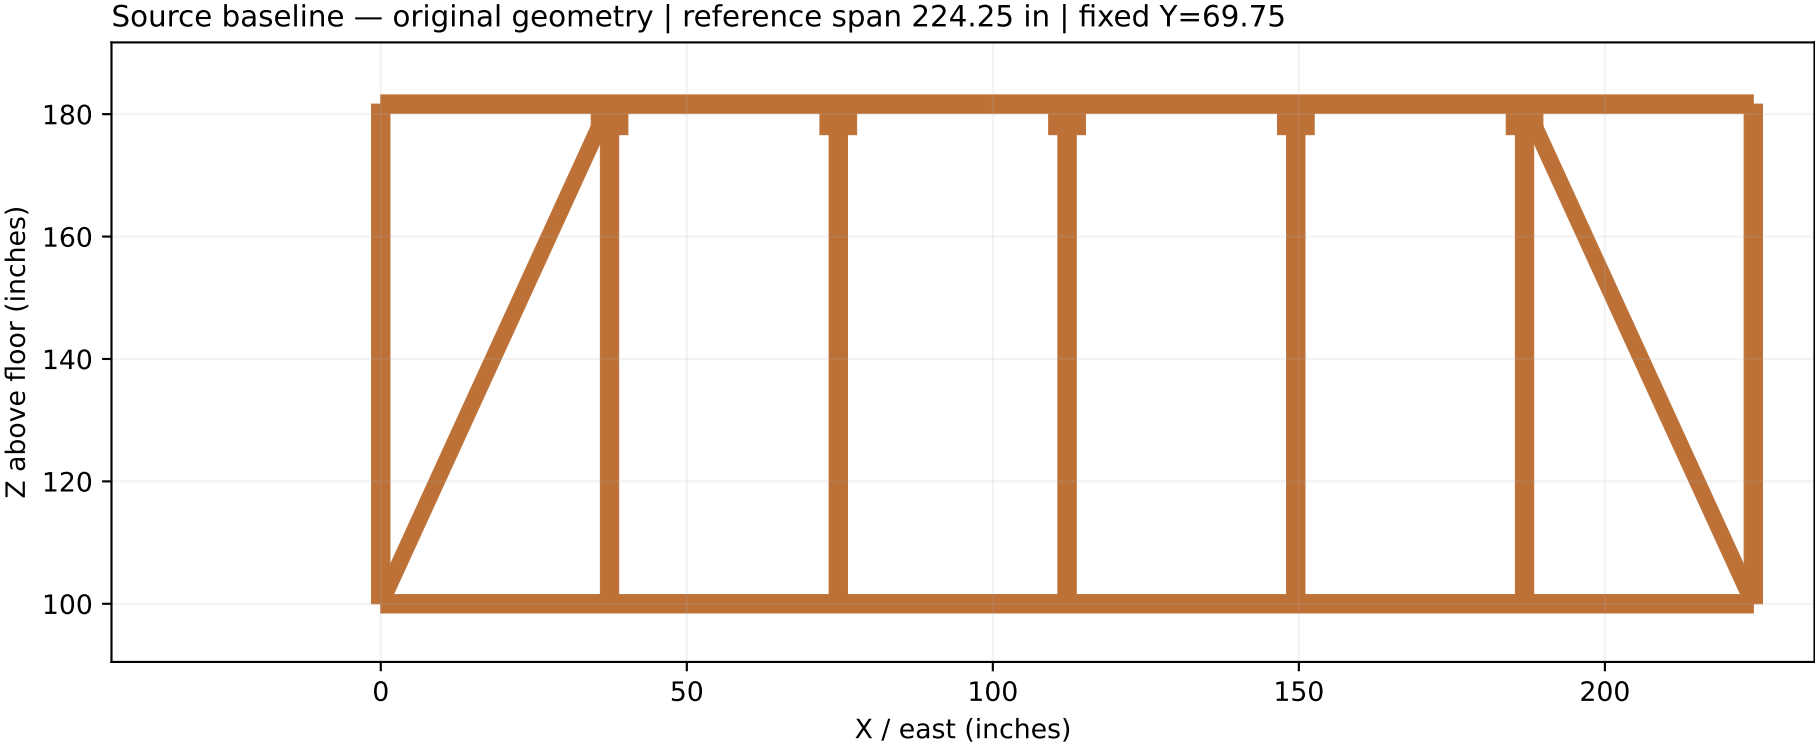



All members regenerated from endpoints and section envelopes. Old mesh import is used only to verify the baseline.
Draft roof and opening details are assumptions; attachment checks are geometric, not structural design.

T-W / PARAMETRIC TRUSS STUDY

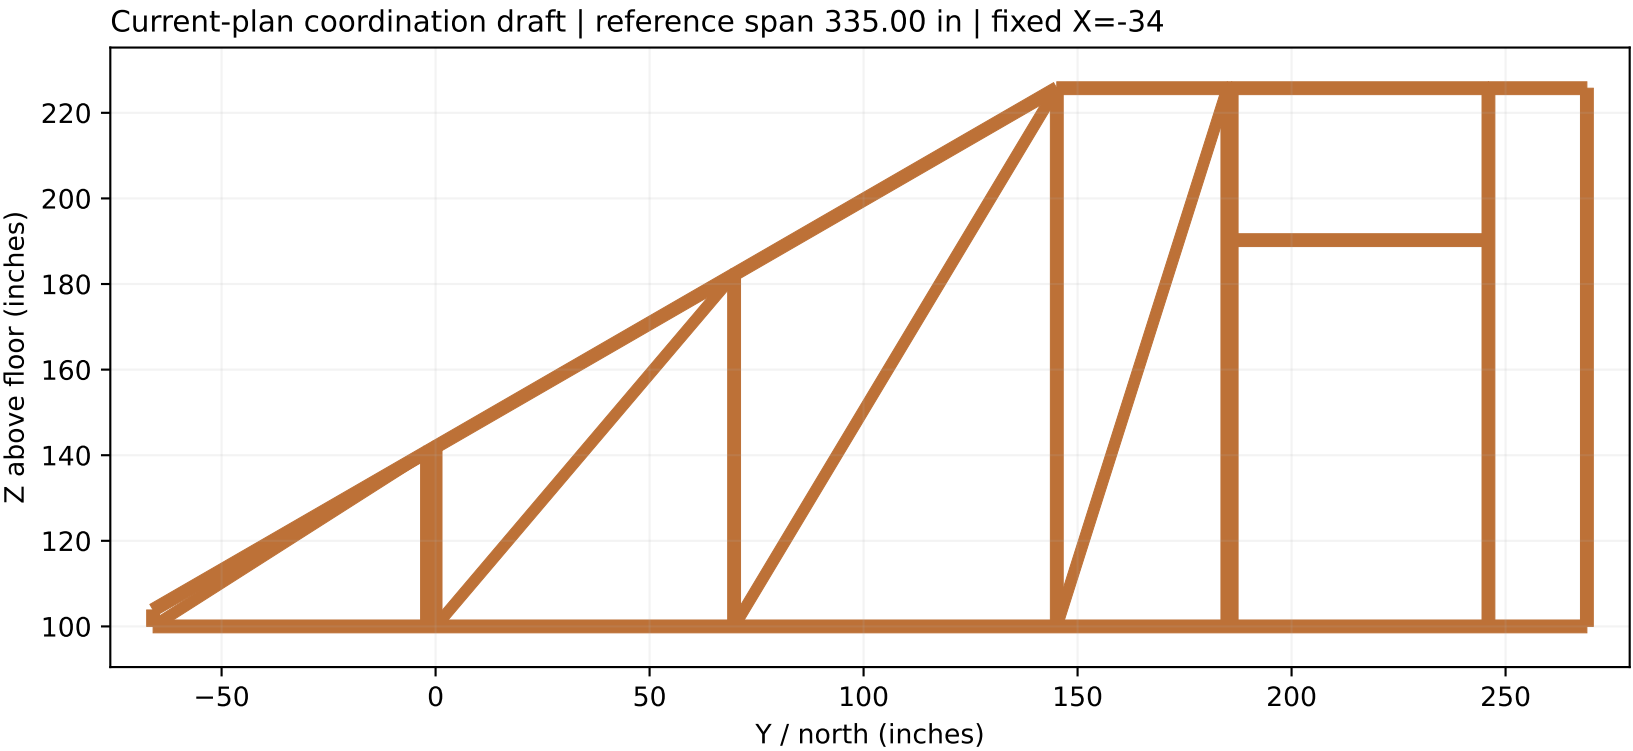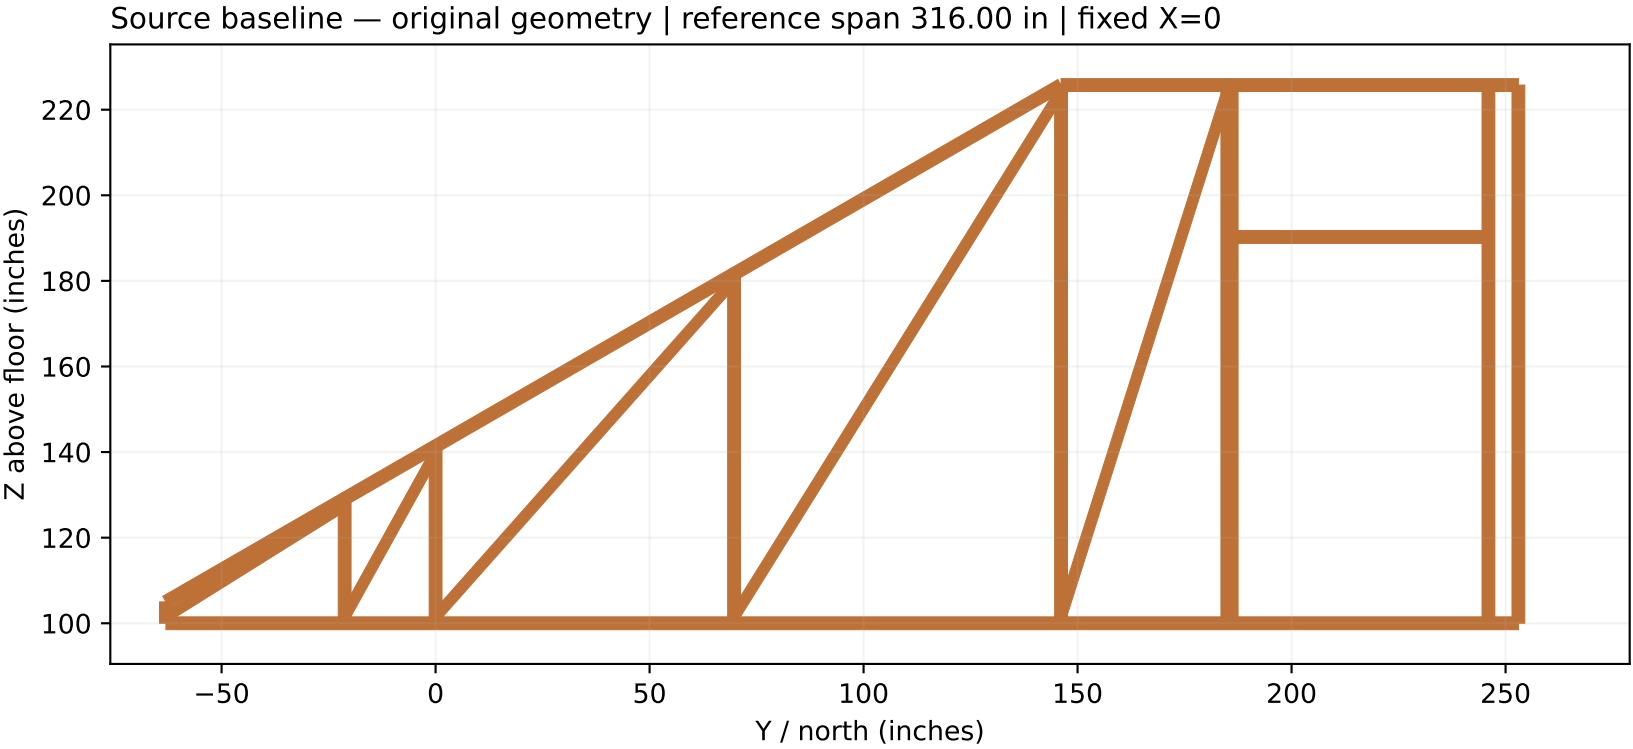



All members regenerated from endpoints and section envelopes. Old mesh import is used only to verify the baseline.
Draft roof and opening details are assumptions; attachment checks are geometric, not structural design.

T-E / PARAMETRIC TRUSS STUDY

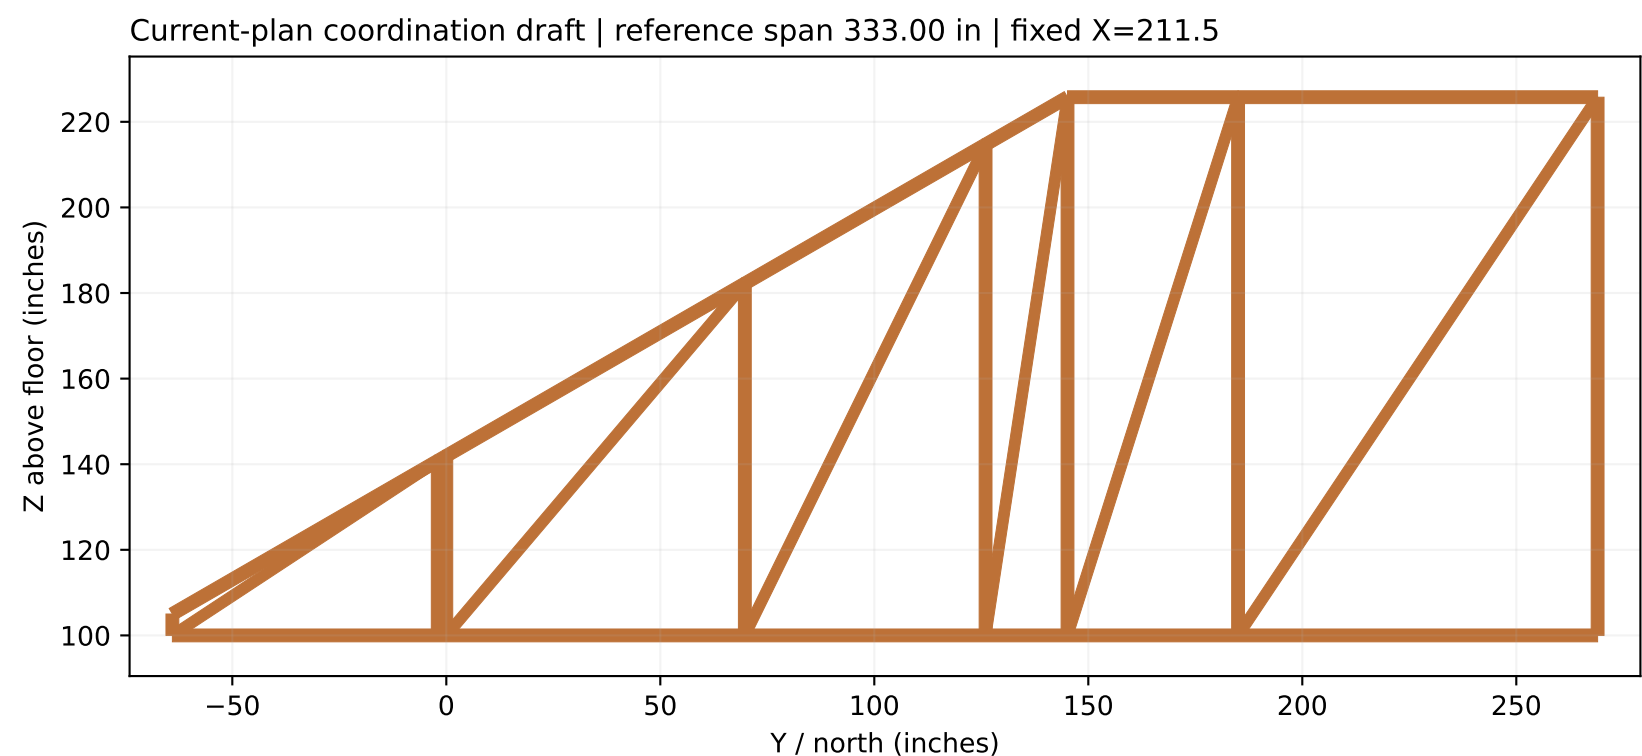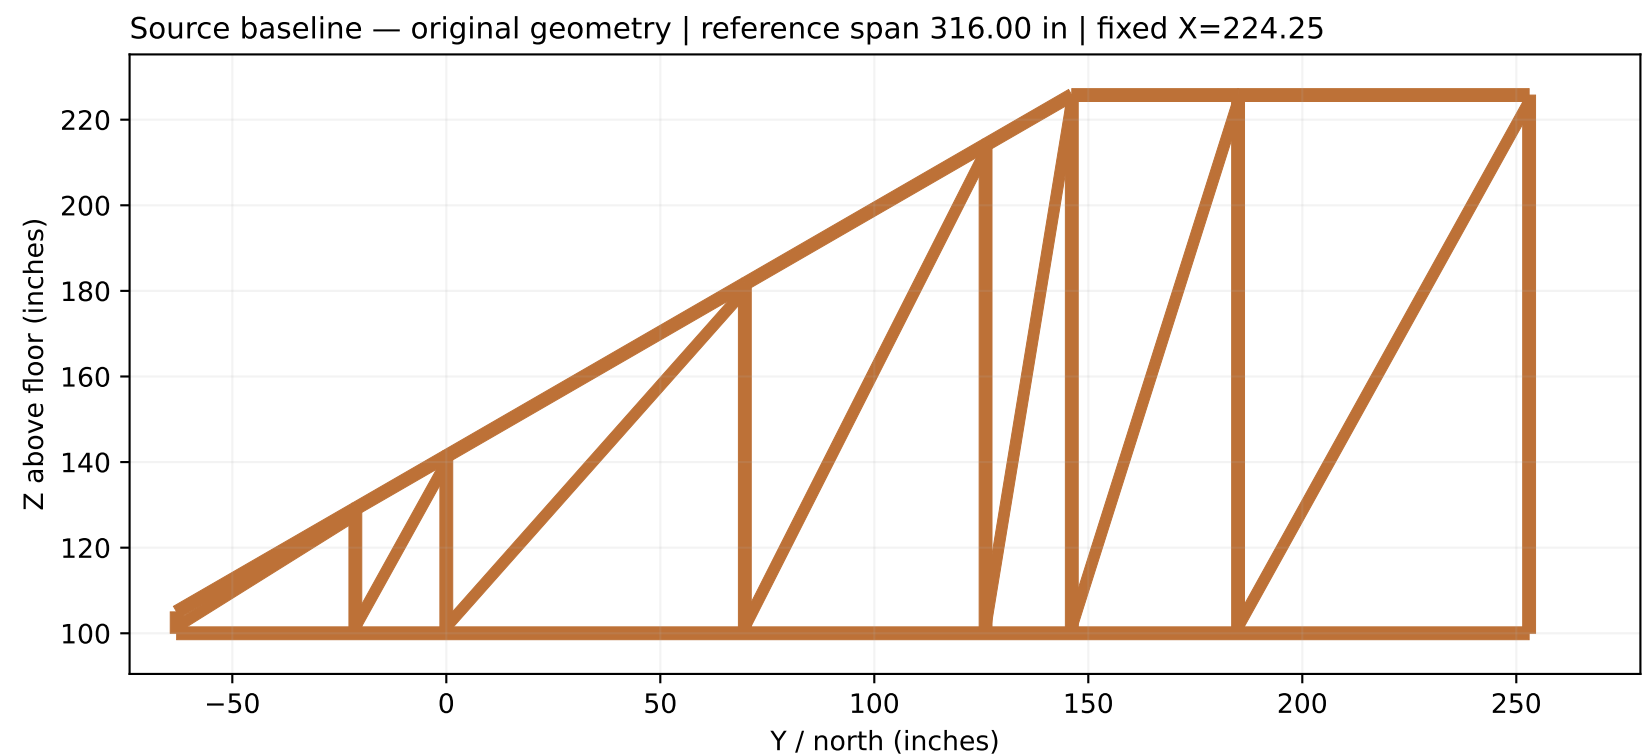

All members regenerated from endpoints and section envelopes. Old mesh import is used only to verify the baseline.
Draft roof and opening details are assumptions; attachment checks are geometric, not structural design.

T-N / PARAMETRIC TRUSS STUDY

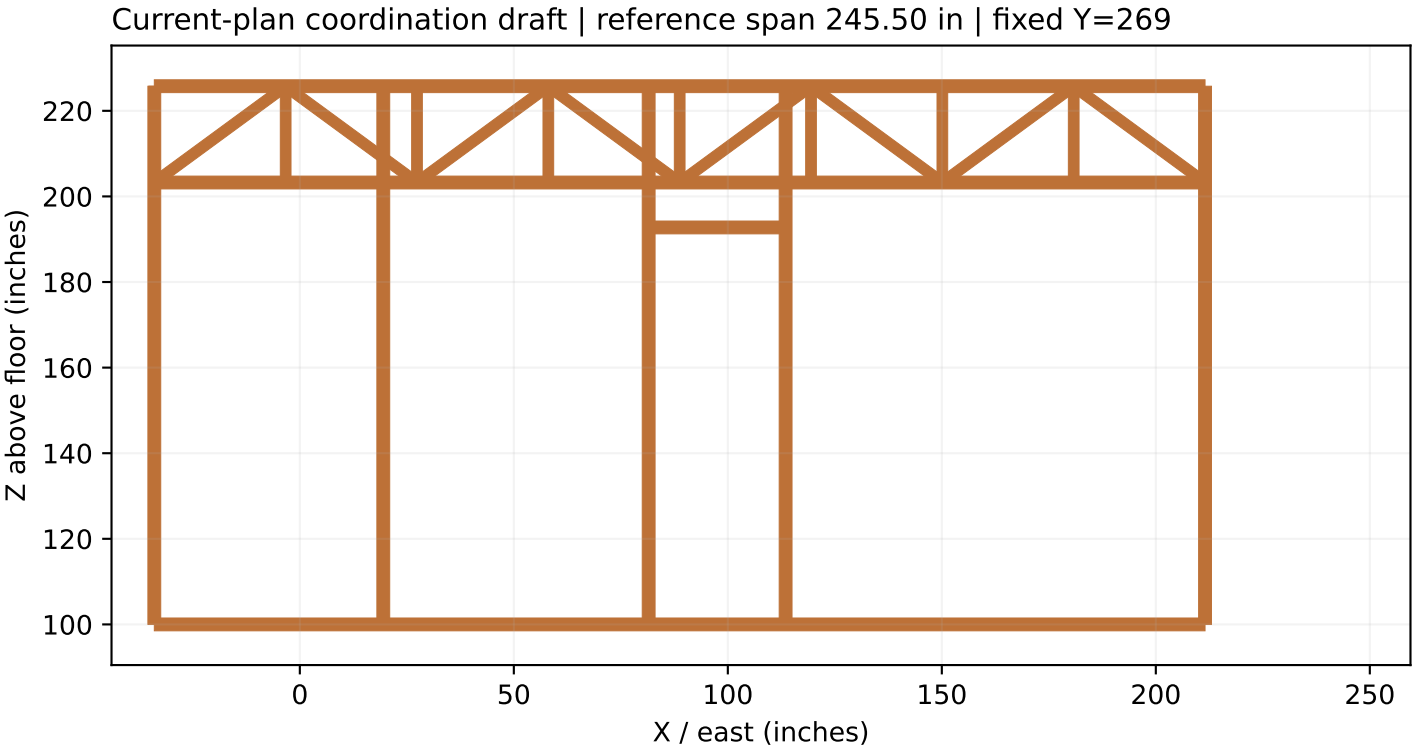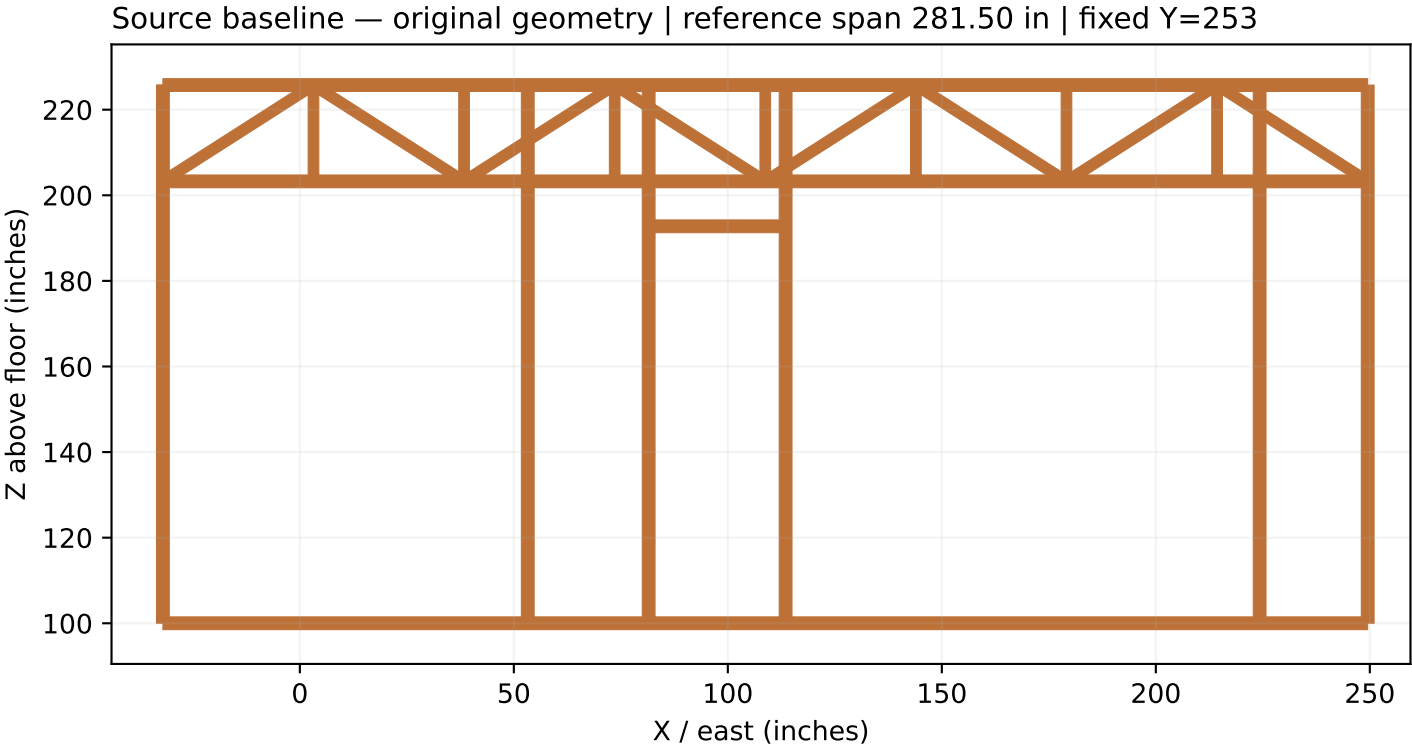

All members regenerated from endpoints and section envelopes. Old mesh import is used only to verify the baseline.
Draft roof and opening details are assumptions; attachment checks are geometric, not structural design.

COORDINATION ITEMS / NOT YET RESOLVED

1. Draft roof retains 30 degrees and old heights, but starts at current T-SO Y=-64. Current roof design is not finalized.
2. User correction: T-W is on the far-west column row X=-34. Cross-members now extend to that row; O2/O3 are subsegments of T1/B2, not separate beams.
3. Longitudinal web tips are moved to chord axes in the draft; source-baseline geometry remains separate.
4. All 13 columns are modeled from floor datum Z=0 to frame bottom Z=98.5 using source plan-symbol sections. East-wall heights are provisional; footing and connection details remain unresolved.
5. E-OB sits at Z98.5 with a provisional 3-inch display envelope matching truss chords; section sizing is unresolved. OB1 elevation remains unknown.
6. T-W source uprights at Y185 and Y186 are only 1 inch apart with 3-inch envelopes: overlap retained for review.
7. T-N loft-door jamb axes X81.5/113.5 give 29 inches between 3-inch faces; source 32 inches is axis spacing.
8. T-W source door header gives 81.5 inches from loft floor to underside; source opening height needs coordination.
9. Ground-floor N1/N2 bay is 192 inches center spacing / 188 inches between 4-inch symbols, separate from the T-N loft door.
10. T-S at Y0 is 2 inches north of S3 at Y=-2; south beam Y=-64 is 2 inches north of the south columns.
11. E-S connects to S3; E-M/E-N connect to T-E at Z98.5 as unsized references. E-M retains option B and its 1-inch offset from E-OB.
12. Truss 3-inch section envelopes have not been reconciled with the plan outside-face limit at X213.5.
13. Mesh validity and geometric connections do not establish structural stability, capacity, connection design or collision-free fabrication.