


Structural scheme · cabinet frames + garage-door jamb posts

All specified beams structural · no added gravity load assigned to existing walls · ≤10" overall beam depth is a target

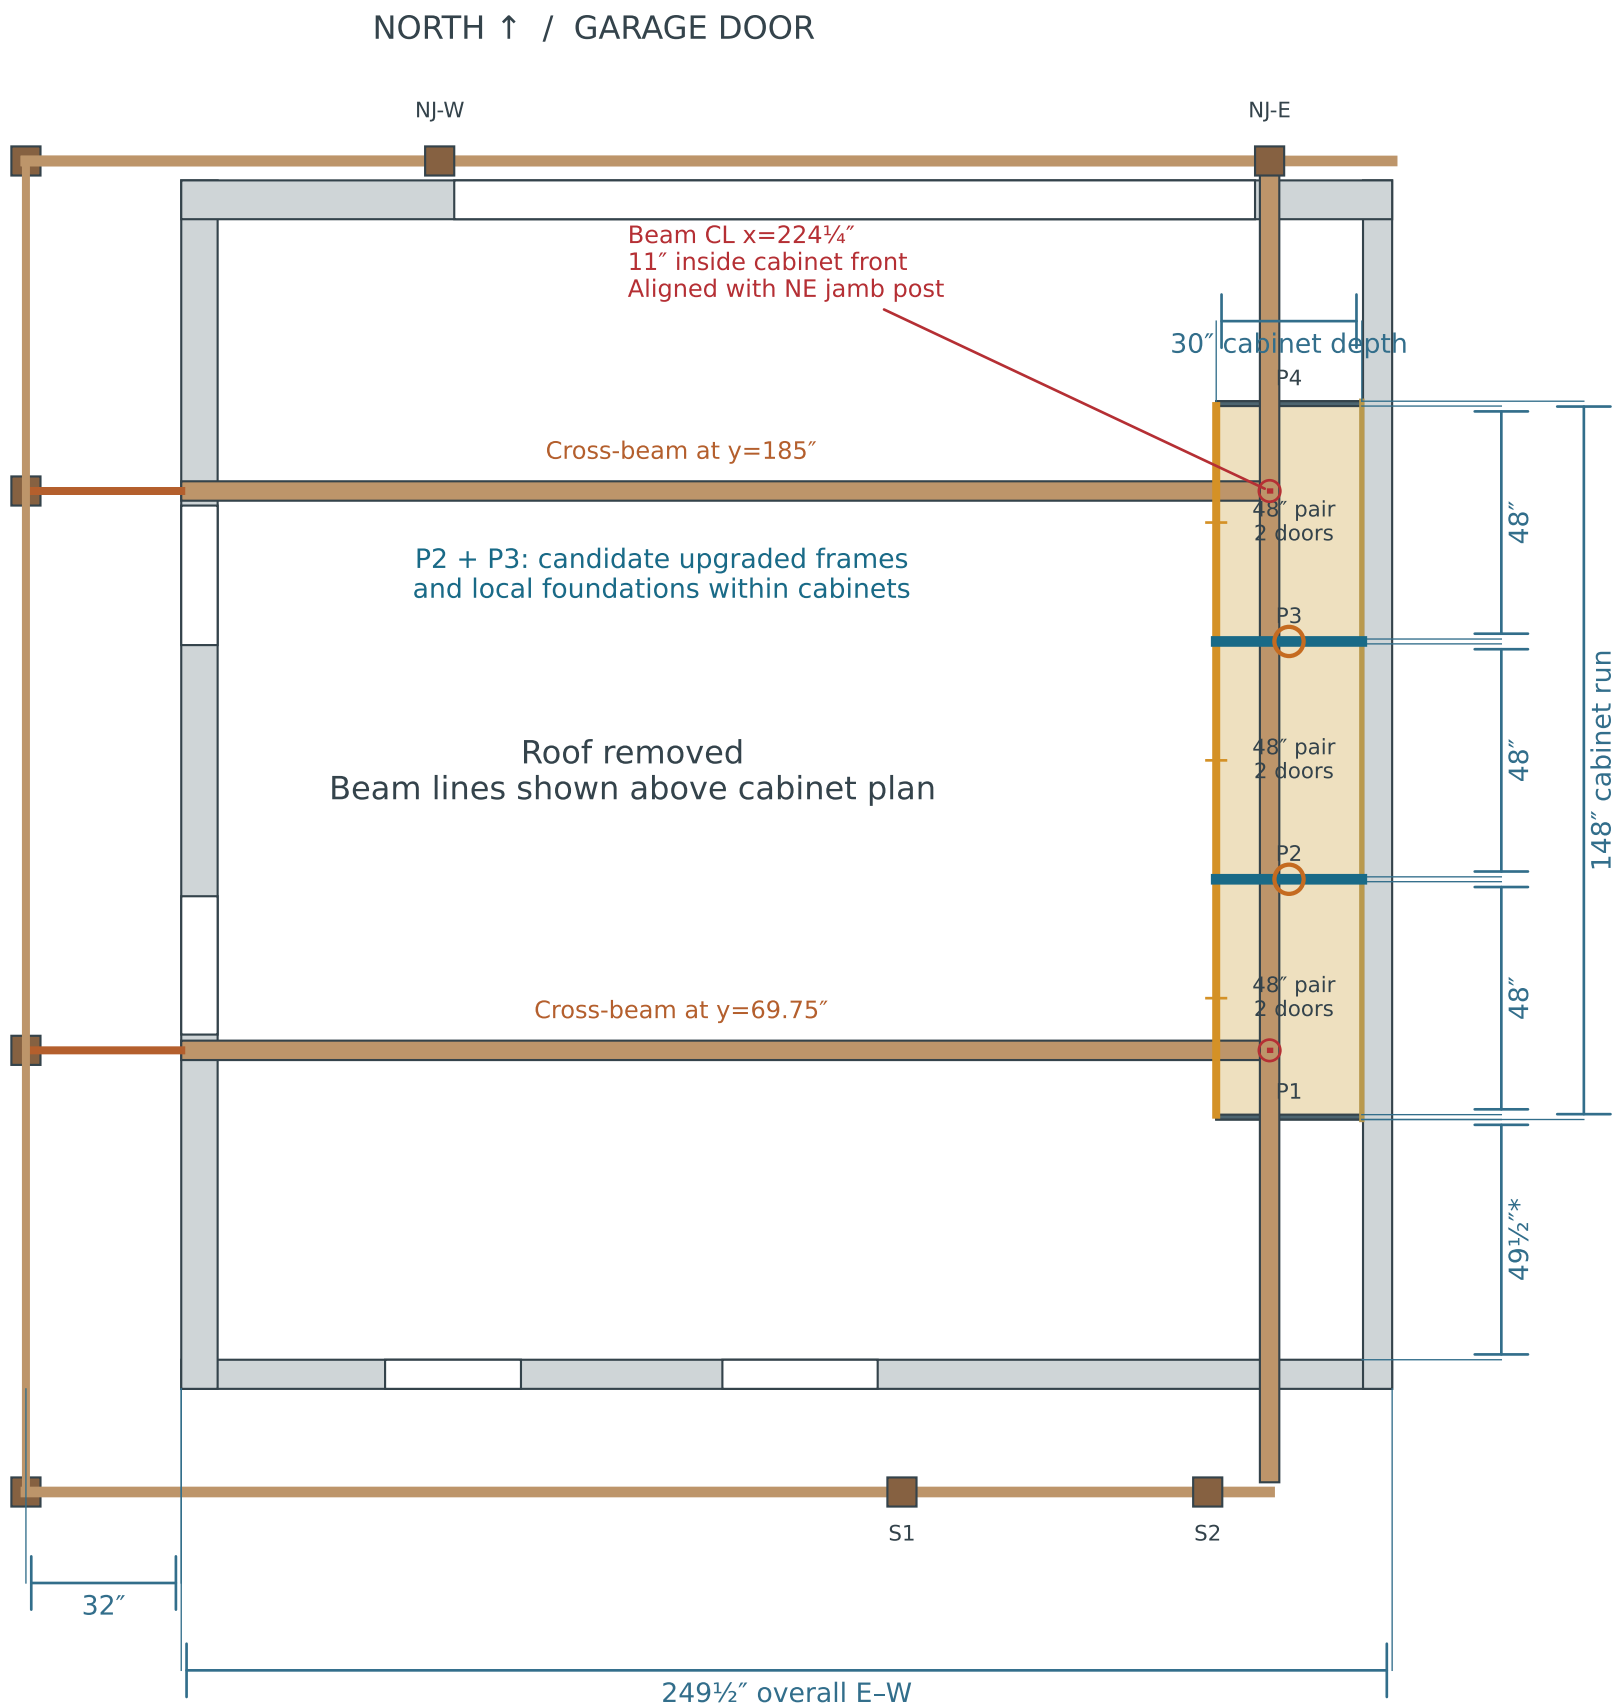


Blue: candidate P2/P3 frame upgrades. Orange rings: local foundation work to investigate, not footing size. P1/P4 remain in the support model.

NJ-W and NJ-E sit just outside the existing garage-door opening; they are jamb posts, not the building corners. North header reaches east garage edge.


Cabinet location and south offset retain earlier assumptions. Exterior piling dimensions approximate; cabinet footing locations/capacities need design.

Cabinet frames · structural concept, not a fabrication detail

Frame P2 / P3 · viewed in cabinet depth

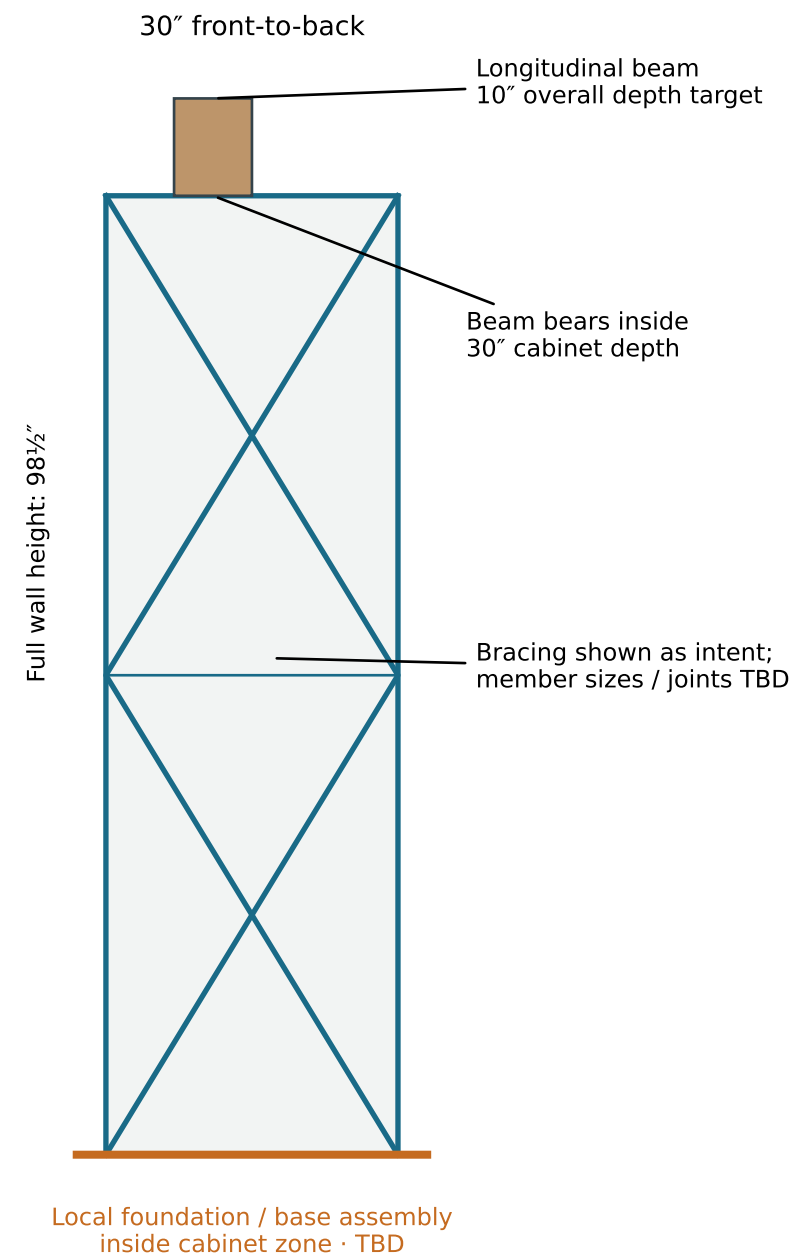

Front constraint + load-path intent

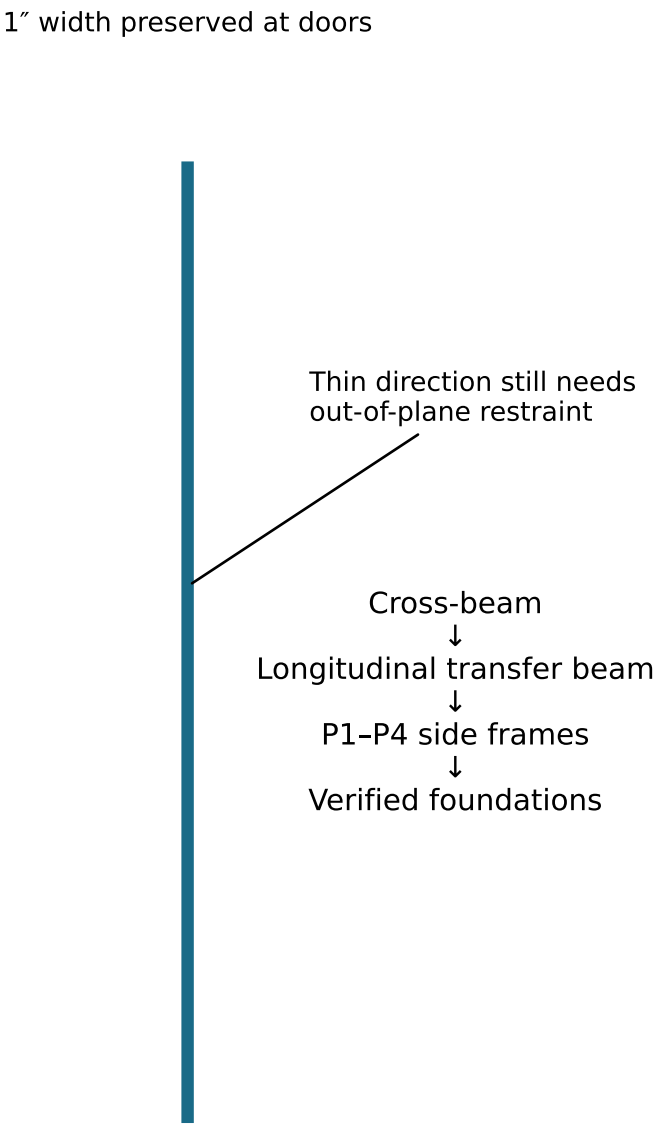

Existing uprights: reported 2" × 1", 11 gauge. Gauge alone does not establish steel grade, actual thickness or capacity.
The 30" dimension is interpreted as cabinet depth, not frame height. Diagonals do not by themselves restrain weak-axis buckling between cabinet bays.